




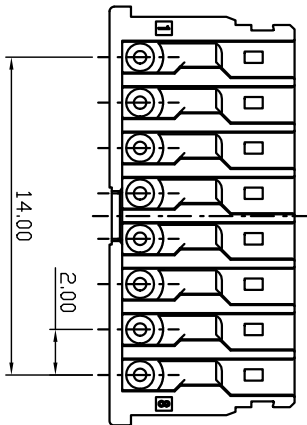

Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

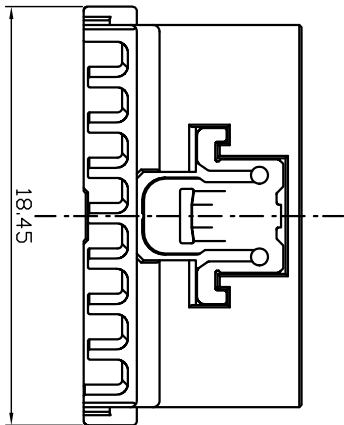

Ordering Information
H2028MR-08P-01-XA





- 1 2 3 4 5
- 1:—Series No.
 - 2:—R:R/A Type
 - 3:—No. of Positions
 - 4:—A:A Type Black
B:B Type Nature
C:C Type Blue
D:D Type Red
 - 5:—A:In Bag

A type Black

B type Nature

C type Blue

D type Red



5X			DR.BY:..	GENERAL TOLERANCE:		PART NO : H2028MR-08P-01-XA		HUBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1 SCALE: 1:1 THIRD ANGLE PROJECTION A4	
4X			ZoLin	LINEAR		DWG. NO.:					
3X				X.: ±5.0°		TITLE : 2.0mm Pitch ULH Series 8Pin Female connector / Right angle up					
2X				X.X: ±0.30							
1X				X.XX: ±0.30							
				X.XXX: ±2.0°							
REV	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 04-Dec-2025	UNIT: mm			