

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0

Color:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature

Range:-40°~+125°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H2028MS-02P-01-XA

1 2 3 4




1:— Series No.

2:— S: Straight Type

3:— No. of Positions

4:— A:A Type Black

B:B Type Nature

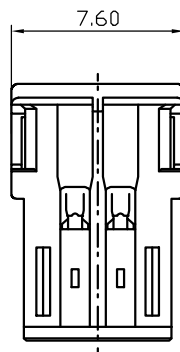

A type Black




B type Nature



5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H2028MS-02P-01-XA
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Hu.CH	X.: ±0.30	X': ±5.0'	TITLE : 2.0mm Pitch ULH Series 2Pin Female connector / Straight Type
2X					X.X: ±0.30	X.X': ±3.0'	
1X	ORIGINAL	Zolin		APPD.: Billy	X.XX: ±0.30	X.XX': ±2.0'	
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0'	DATE: 05-Dec-2025

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



A4