




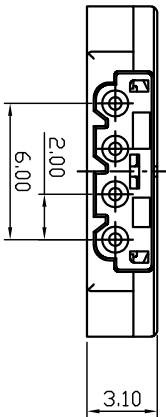

Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute



Ordering Information
H2028MS-04P-02-XA

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A:A Type Black
B:B Type Nature
C:C Type Blue
D:D Type Red

D	A type Black	B type Nature	C type Blue	D type Red
---	--------------	---------------	-------------	------------



5X			DR.BY: Zolin	GENERAL TOLERANCE:		PART NO : H2028MS-04P-02-XA		HUBRIGHT® 東莞市華晶電子有限公司	
4X				LINEAR		DWG. NO.:		BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
3X				CHKD: Hu.CH	X: ±5.0°	TITLE : 2.0mm Pitch ULH Series 4Pin Female connector / Straight Type with flange			
2X					X.X: ±0.30	SHEET: 1/1			
1X	ORIGINAL	Zolin	APPD: Billy	X.XX: ±0.30	X.XX: ±2.0°	SCALE: 1:1			
REV	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 05-Dec-2025		UNIT: mm	THIRD ANGLE PROJECTION
1	2	3	4	5	6	7	8	9	