




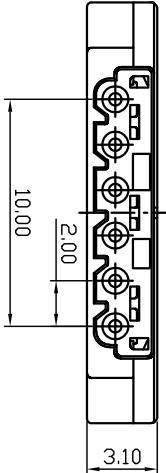

Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

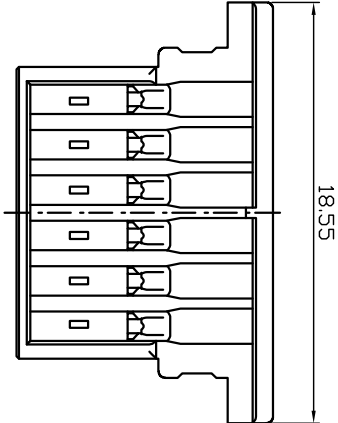

Ordering Information
H2028MS-06P-02-XA

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: A Type Black
B: B Type Nature
C: C Type Blue
D: D Type Red

A type Black		B type Nature		C type Blue		D type Red	

5X			DR.BY: Zolin	GENERAL TOLERANCE:		PART NO : H2028MS-06P-02-XA	
4X				LINEAR		DWG. NO.:	
3X				X.:	X': ±5.0'	TITLE : 2.0mm Pitch ULH Series 6Pin Female connector / Straight Type with flange	
2X			CHKD: Hu.CH	X.X: ±0.30	X.X': ±3.0'		
1X	ORIGINAL	Zolin	APPD:	X.XX: ±0.30	X.XX': ±2.0'		
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0'	DATE: 05-Dec-2025
1			3		4	5	6
2							7
3							8
4							9
5							
6							
7							
8							
9							