

RoHS Compliant



Automobile
Product

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0

Color:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature




Range:-40°~+125°C

Electrical:

Contact resistance:15m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

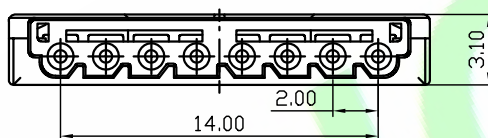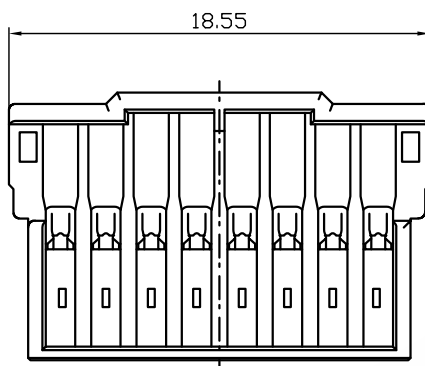

Ordering Information

H2028MS-08P-01-XA

1 2 3 4

1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — A: A Type Black

B: B Type Nature

C: C Type Blue

D: D Type Red

A type Black

C type Blue



B type Nature


D type Red



5X			
4X			
3X			
2X			
1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Zolin	GENERAL TOLERANCE:	
CHKD.: Hu.CH	LINEAR	ANGLES
APPD.: Billy	X.: ±0.30	X': ±5.0°
	X.X: ±0.30	X.X': ±3.0°
	X.XX: ±0.30	X.XX': ±2.0°
	X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : H2028MS-08P-01-XA
DWG. NO.:
TITLE : 2.0mm Pitch ULH Series 8Pin Female connector / Straight Type
DATE: 05-Dec-2025

HJBRIGHT[®] 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		