




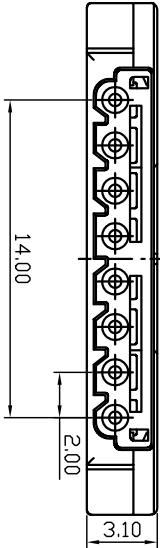

Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

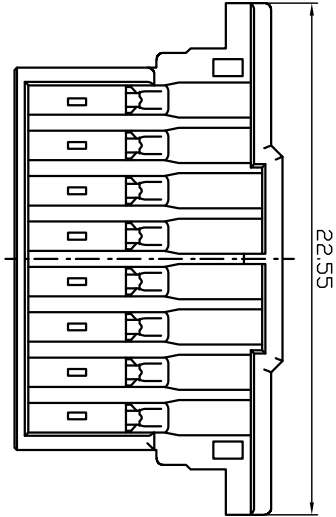

Ordering Information
H2028MS-08P-02-XA

- 1: — Series No.
2: — S:Straight Type
3: — No. of Positions
4: — A:A Type Black
B:B Type Nature
C:C Type Blue
D:D Type Red

A type Black

B type Nature

C type Blue

D type Red



5X				DR.BY: ZoIn	GENERAL TOLERANCE:		PART NO : H2028MS-08P-02-XA	DWG. NO.:	TITLE : 2.0mm Pitch ULH Series 8Pin Female connector / Straight Type with Flange	SHEET: 1/1			THIRD ANGLE PROJECTION	A4
4X					LINEAR	ANGLES				SCALE: 1:1				
3X				CHKD: Hu.CH	X: ±5.0°									
2X					X.X: ±0.30	X.X: ±3.0°								
1X	ORIGINAL	ZoIn		APPD: Billy	X.XX: ±0.30	X.XX: ±2.0°								
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 05-Dec-2025			UNIT: mm				