

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0

Color:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature

Range:-40°~+125°C

Electrical:

Contact resistance:15m Ohm Max




Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H2028MS-10P-01-XA

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: A Type Black
B: B Type Nature
C: C Type Blue
D: D Type Red

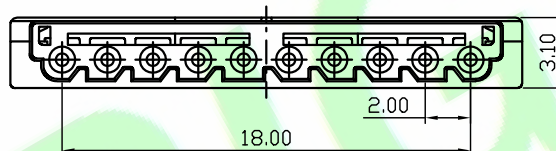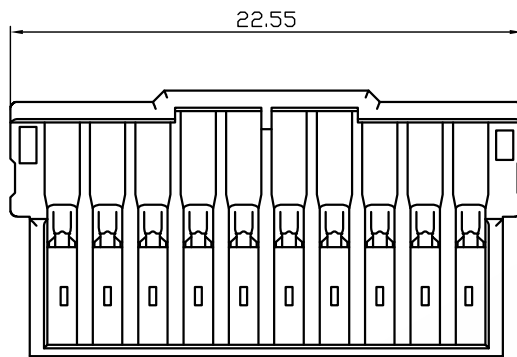

RoHS Compliant





Automobile
Product

A type Black

B type Nature

C type Blue

D type Red



5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H2028MS-10P-01-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Hu.CH	x.: ±5.0°	x': ±5.0°	TITLE : 2.0mm Pitch ULH Series 10Pin Female connector / Straight Type				
2X					x.x: ±0.30	x.x': ±3.0°					
1X	ORIGINAL	Zolin		APPD.: Billy	x.xx: ±0.30	x.xx': ±2.0°	DATE: 05-Dec-2025				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°	UNIT: mm		SCALE: 1:1		

A4