




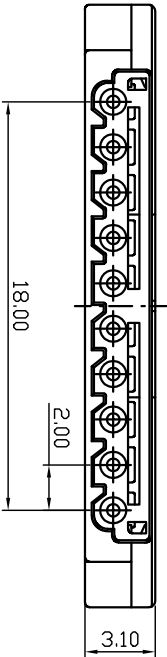

Specifications:
Material And Finish:
Insulator:Nylon 9T UL94V-0
Color:See Ordering Information

Rating:
Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

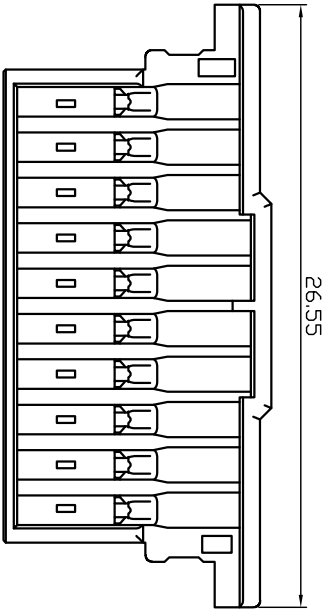

Ordering Information
H2028MS-10P-02-XA

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: A Type Black
B: B Type Nature
C: C Type Blue
D: D Type Red

A type Black

B type Nature

C type Blue

D type Red



5X			DR.BY: ZoLin	GENERAL TOLERANCE:		PART NO : H2028MS-10P-02-XA	
4X				LINEAR	ANGLES	DWG. NO.:	
3X			CHKD: Hu.CH	X:	X: ±5.0°	TITLE : 2.0mm Pitch ULH Series 10Pin Female connector / Straight Type with Flange	
2X				X.X: ±0.30	X.X: ±3.0°		
1X	ORIGINAL	ZoLin	APPD:	X.XX: ±0.30	X.XX: ±2.0°		
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX: ±1.0°	DATE: 05-Dec-2025
				UNIT: mm			
				A4			

HJBRIGHT®

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

東莞市華晶電子有限公司

