

RoHS Compliant

Automobile
Product**Specifications:****Material And Finish:**

Contact:High Conductivity Copper
Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature
Range:-40°~+125°C

Electrical:

Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering InformationH2028TFR-PX-01



1 2 3

1:—Series No.

2:—R:R/A Type

3:—Q:Tin Plated

H:Selective Gold Plated

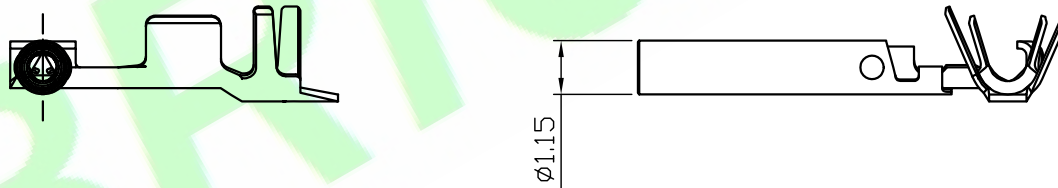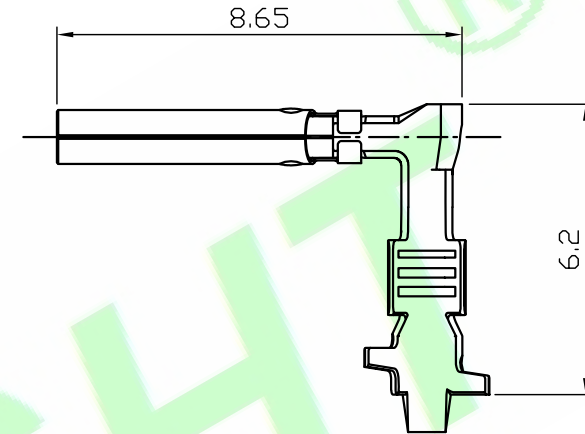

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H2028TFR-PX-01		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Hu.CH	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : 2.0mm Pitch ULH Series Female terminal / Right angle				
2X						x.xx: ±0.30					
1X	ORIGINAL	Zolin		APPD.: Billy	x.xxx: ±0.15	x.xxx': ±1.0°	DATE: 05-Dec-2025		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.				UNIT: mm		SCALE: 1:1		