

Specifications:

Material And Finish:

Insulator:PBT

Rating:

Current—Maximum per contact:4.0 Amp (22AWG)





Operating Temperature Range:—40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

2 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION A2 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION B2 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION C2 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION D

Ordering Information

H2062-XX-XX-XX

1 2 3 4 5

1:—Series No.

2:—No. of Positions

3:—01:Without Lock Bridge

02:With Lock Bridge

(2P does not 01 have this option)

4:—Polarization OPTION:

A: A Type Color:Black









B: B Type Color:Gray

C: C Type Color:Dark Gray

D: D Type Green

(8P does not D have this option)

5:—A:In bag

4 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION A4 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION B4 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION C4 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION D4 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION A4 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION B4 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION C4 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION D

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2062-XX-XX-XX
	LINEAR	ANGLES	
	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
	X.XX: ±0.10	X.XX': ±2.0°	TITLE :
CHKD.: Hu.Hu	X.XXX: ±0.05	X.XXX': ±1.0°	
APPD.: Billy	DATE: 13-Jul-2022		MINI 50 SINGLE ROW RECEPTALCE SALES DRAWING

HJBRIGHT® 东莞市華晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/3







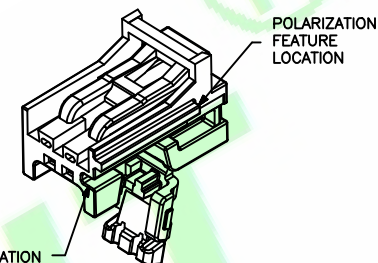

SCALE: 1:1

UNIT: mm




THIRD ANGLE PROJECTION

A4



8 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION A8 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION B8 CIRCUIT RECEPTACLE NO BRIDGED
POLARIZATION OPTION C8 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION A8 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION B8 CIRCUIT RECEPTACLE BRIDGED
POLARIZATION OPTION C2 CIRCUIT RECEPTACLE SHOWN
(AS SHIPPED)POLARIZATION
FEATURE
LOCATION4 CIRCUIT RECEPTACLE SHOWN
(AS SHIPPED)MINI50 WITH BRIDGE OPTION
COMES WITH CPA TRAY

RECYCLING CODE



SCALE 7:1

CIRCUIT ID



PLANT CODE& CAVITY ID

SCALE 7:1

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2062-XX-XX-XX
	LINEAR	ANGLES	
CHKD.: Hu.Hu	X.: ± 0.30	X': $\pm 5.0^\circ$	DWG. NO.:
	X.X: ± 0.20	X.X': $\pm 3.0^\circ$	
APPD.: Billy	X.XX: ± 0.10	X.XX': $\pm 2.0^\circ$	TITLE : MINI 50 SINGLE ROW RECEPTALCE SALES DRAWING
	X.XXX: ± 0.05	X.XXX': $\pm 1.0^\circ$	
			DATE: 13-Jul-2022

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/3
SCALE: 1:1
UNIT: mm




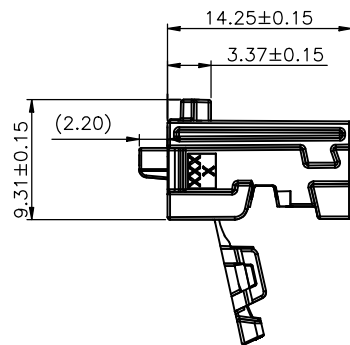


THIRD ANGLE PROJECTION





A4

NOTE:
KEY A SHOWN AS REFERENCE





8 CIRCUIT



8 CIRCUIT



8 CIRCUIT



Ø(DIM A)
PASS THRU 1MM ADDED TO TIGHTEST FIT

CIRCUIT	Part Number	DIM A
2 CIRCUIT	H2062-02-02-XX	13.33
4 CIRCUIT	H2062-04-01-XX	15.26
4 CIRCUIT	H2062-04-02-XX	16.09
8 CIRCUIT	H2062-08-01-XX	22.52
8 CIRCUIT	H2062-08-02-XX	22.52

DR.BY.:
JudyyanGENERAL TOLERANCE:
LINEAR ANGLES

PART NO : H2062-XX-XX-XX

CHKD.:
Hu.HuX.: ±0.30 X': ±5.0°
X.X: ±0.20 X.X': ±3.0°

DWG. NO.:

APPD.:
BillyX.XX: ±0.10 X.XX': ±2.0°
X.XXX: ±0.05 X.XXX': ±1.0°

TITLE :

MINI 50 SINGLE ROW
RECEPTALCE SALES DRAWING

DATE: 13-Jul-2022


HJBRIGHT®

東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 3/3

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan
REV.	DESCRIPTION	DR.BY

ECN. NO.