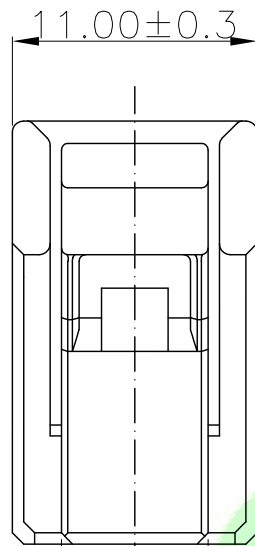
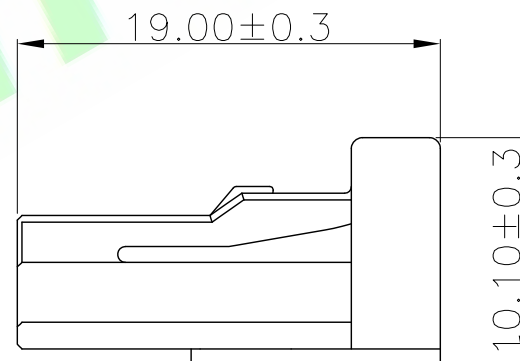



Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

1 2 3

3: — A: In Bag

 11.00 ± 0.3 6.5 ± 0.2  19.00 ± 0.3 10.10 ± 0.3 
$$2.20 \pm 0.1$$
$$6.60 \pm 0.3$$

5X				DR.BY: Samson	GENERAL TOLERANCE:		PART NO : H2200-04P-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES					
3X				CHKD: Tony	x.: ±0.30	x*: ±5.0°	DWG. NO.:		SHEET: 1/1 		
2X					x.x: ±0.20	x.x*: ±3.0°	TITLE :				
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°	2.20mm Pitch Series Female Housing		SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 11-Jul-2019		UNIT: mm		