

Specifications:

Material And Finish:

Insulator:PPE UL94V-0 Color:Gray

Rating:

Current Rating:3.0 Amp

Voltage Rating:50V AC/DC




Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

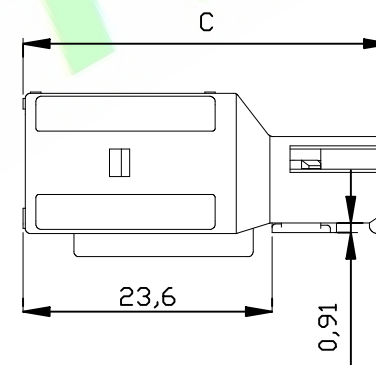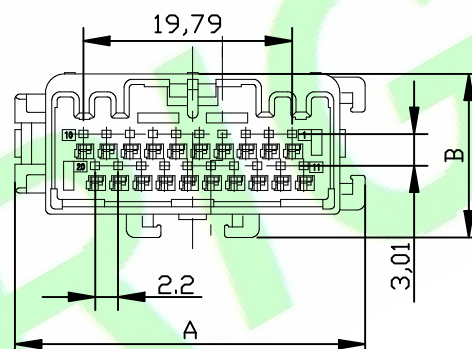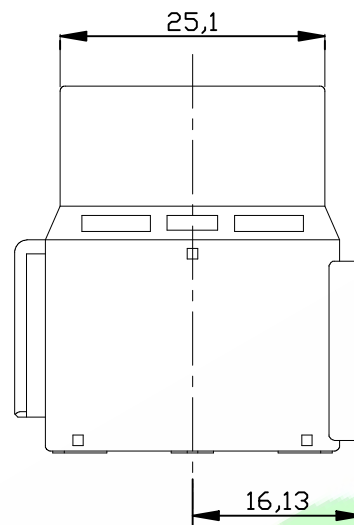

Ordering Information

H22001F-XXP-01-XA

1 2 3 45

- 1: — Series No.
2: — F:Female
3: — No. of Positions
4: — B:Black
GR:Gray
5: — A:In Bag


Poles	Dimensions(mm)		
	A	B	C
12	24.2	15.6	34.8
16	28.6		
20	33		

1X	ORIGINAL	Kang	
REV.	DESCRIPTION	DR.BY	

DR.BY.: Kang	GENERAL TOLERANCE:		PART NO : H22001F-XXP-01-XA
	LINEAR	ANGLES	
CHKD.: Tony	X.:	X': ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE : 2.2 mm HOUSING CONNECTOR
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 23-May-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4