

Specifications:

Material And Finish:

Insulator: PBT UL94V-0 Color:Gray

Retainer: PBT UL94V-0 Color:Black

Rating:

Current Rating: 3.0 Amp

Voltage Rating:125V AC/DC




Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 250V AC/Minute

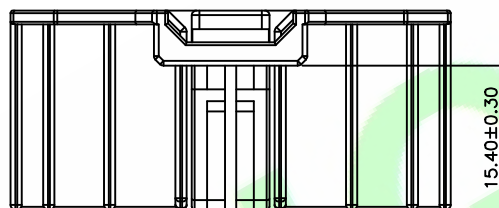
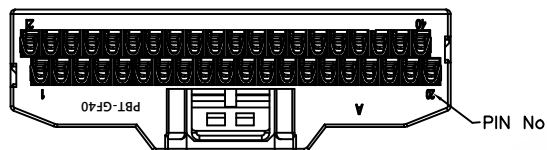


Ordering Information

H22001M-XXP-01-XA

1 2 3 4 5

- 1:— Series No.
2:— M:Male Housing
3:— No. of Positions
4:— B:Black
GR:Gray
5:— A: In Bag

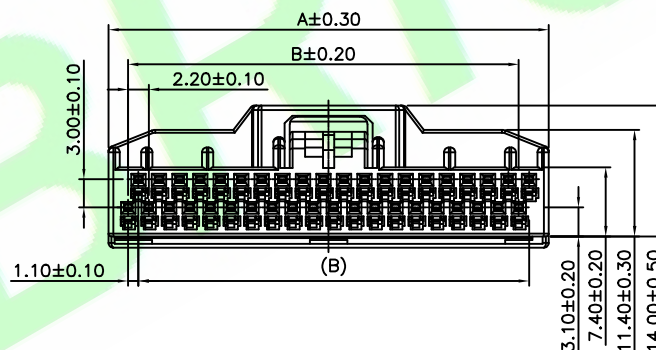DR.BY.:
kang

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : H22001M-XXP-01-XA

DWG. NO.:

CHKD.:
kang

X.:

X': ±5.0°

X.X: ±0.25

X.X': ±3.0°

X.XX: ±0.15

X.XX': ±2.0°

X.XXX: ±0.05

X.XXX': ±1.0°

TITLE :

2.20mm Pitch Housing Double Row


DATE: 13-Sep-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2

SCALE: 1:1


UNIT: mm




THIRD ANGLE PROJECTION

A4


1X	ORIGINAL	kang	
REV.	DESCRIPTION	DR.BY	ECN. NO.




12P




16P




20P




24P




28P

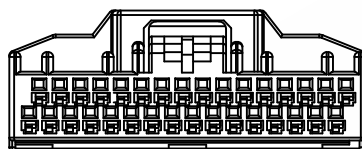

32P

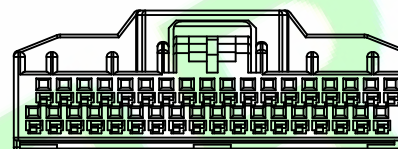

36P

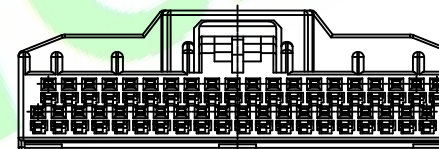

40P

Pin	Dimension	
	A	B
12P	16.30	11.00
16P	20.70	15.40
20P	25.10	19.80
24P	29.50	24.20
28P	33.90	28.60
32P	38.30	33.00
36P	42.70	37.40
40P	47.10	41.80

DR.BY.:
kang

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : H22001M-XXP-01-XA

DWG. NO.:

TITLE :

2.20mm Pitch Housing Double Row

DATE: 13-Sep-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	kang	ECN. NO.
REV.	DESCRIPTION	DR.BY	

APPD.:
Billy

X.X: ±0.25

X.XX: ±0.15

X.XXX: ±0.05

X': ±5.0°

X.X': ±3.0°

X.XX': ±2.0°

X.XXX': ±1.0°