


Specifications:
 Material: Copper alloy
 Mating cycles: 50

Ordering Information

H22001TF-XX-XX

1 2 3 4 5

- 1: — Series No.
- 2: — TF: Female Terminal
- 3: — C: High-conductivity copper
P: Phosphor copper
- 4: — AG: Silvering Plated
S: Matte Tin Plated
Q: Tin Plated
- 5: — 01: 0.35~0.5mm²
02: 0.5~0.75mm²

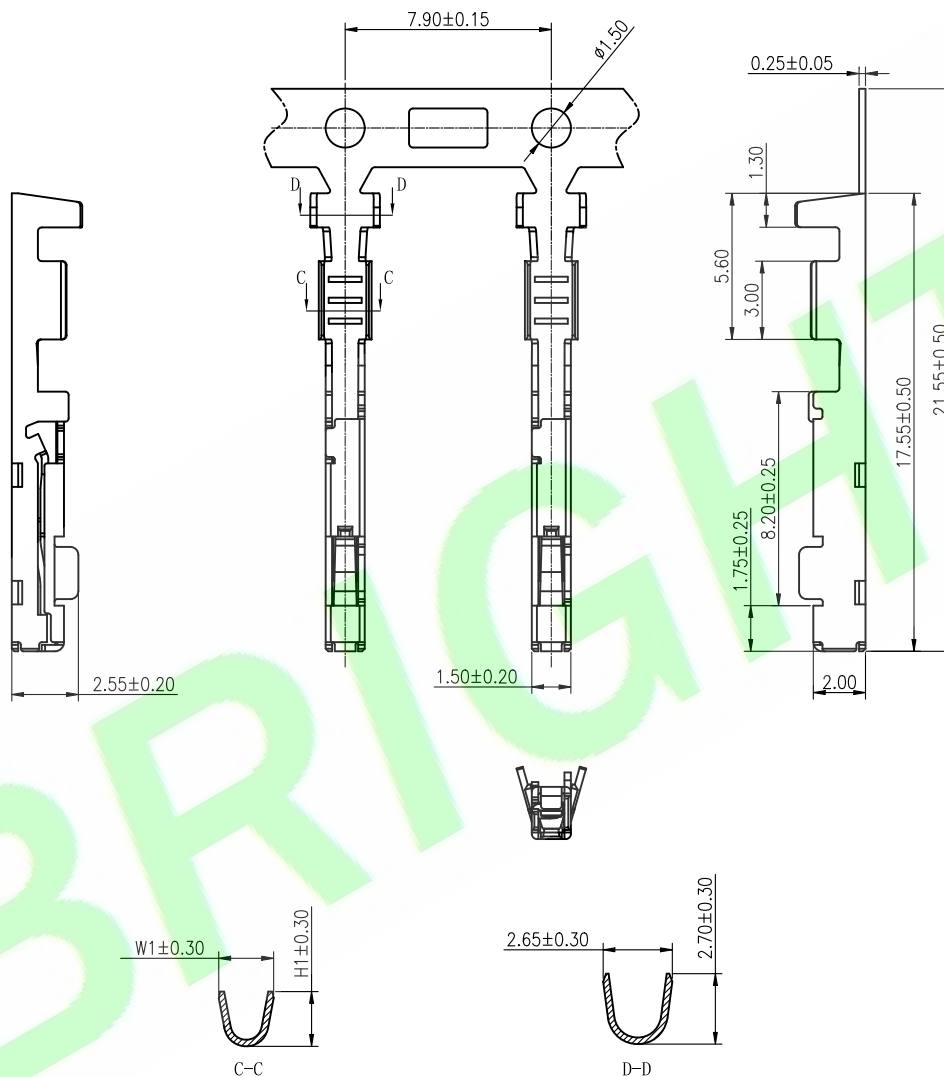

H22001TF-CX-01	0.35~0.5mm ²	2.10	2.10
H22001TF-CX-02	0.5~0.75mm ²	2.15	2.30
P/N	WIRE RANGE	W1	H1

2X	New specifications	Hu.CH	2025.12.24
1X	ORIGINAL	kang	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY: kang	GENERAL TOLERANCE:		PART NO : H22001TF-XX-XX
CHKD: kang	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :
	X.X: ±0.25	X.X': ±3.0°	2.2mm Pitch Female Terminal
	X.XX: ±0.15	X.XX': ±2.0°	DATE: 17-Sep-2023
	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4