

Specifications:

Material And Finish:

Insulator:PPE UL94V-0 Color:Gray

Rating:

Current Rating:3.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information


H22010-XXP-XXA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01:Black
02:Blue
03:Beige
04:Gray
4: — A:In Bag

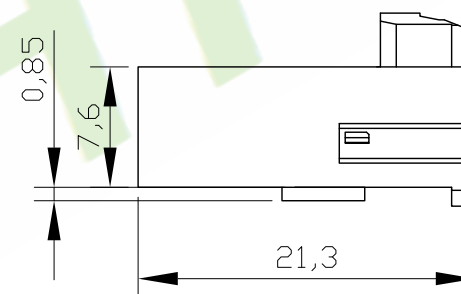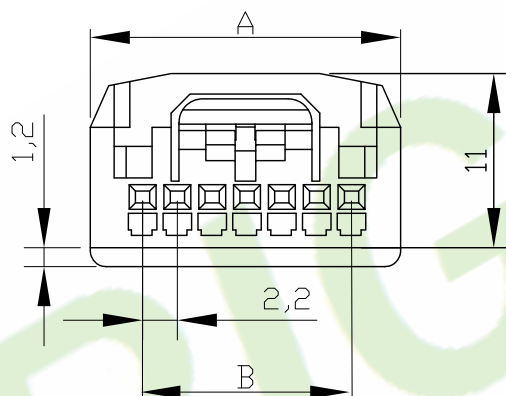

Poles	Dimensions(mm)	
	A	B
03	10.8	4.4
05	15.2	8.8
07	19.6	13.2

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H22010-XXP-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:					
3X				APPD.: Billy	X.: ±0.30	X.X: ±0.20	TITLE : 2.2 mm HOUSING Connector	DATE: 10-Oct-2017		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X					X.XX: ±0.10	X.XXX: ±0.10				UNIT: mm		
1X	ORIGINAL	Samson	20230523									
REV.	DESCRIPTION	DR.BY	ECN. NO.									