


Specifications:

Material And Finish:




Insulator:PBT UL94V-0 Color:Natural

Wire Rang:0.3-0.5MM²


Temperature Range:-40°C~+125°C

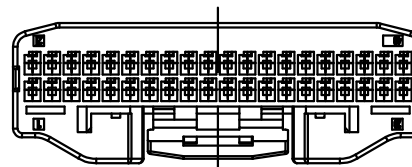


$$2.2*(N/2-1)+4.4\pm0.5$$

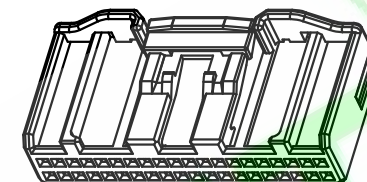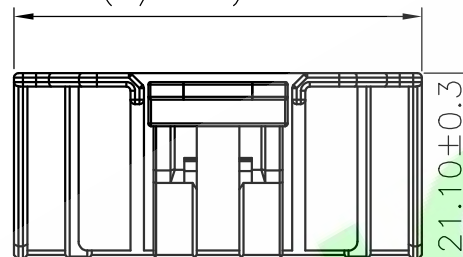


12P




16P




24P



28P



32P

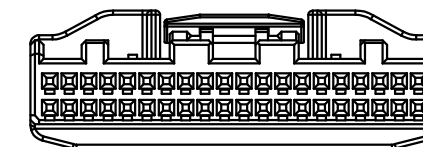

40P

Ordering Information

H22011-XXP-XA

1 2 34



1: — Series No.

2: — No. of Positions

3: — N:Natural

B:Black

4: — A:In Bag

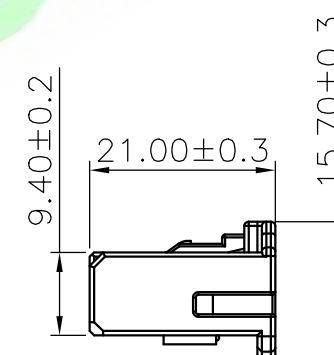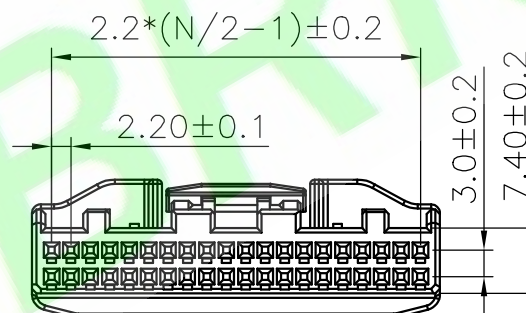

3X	Added specifications	Zolin	20240716
2X	Update the code option	Judyyan	20221005
1X	ORIGINAL	Bruce	
REV	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Bruce	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	x.: ±0.15	x': ±3.0°
	x.x: ±0.10	x.x': ±2.0°
	x.xx: ±0.05	x.xx': ±1.0°
	x.xxx: ±0.02	x.xxx': ±0.5°

PART NO : H22011-XXP-XA
DWG. NO.:
TITLE : CN11 Series Female Housing
DATE: 1-Aug-2018

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4