

Specifications:

Material And Finish:

Insulator:PPE UL94V-0 Color:Gray

Rating:

Current Rating:3.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information

H2201M-XXP-01-XA

1 2 3 45

- 1: — Series No.
2: — No. of Positions
3: — M:Male
4: — B:Black
BL:Blue
BE:Beige
GR:Gray
5: — A:In Bag

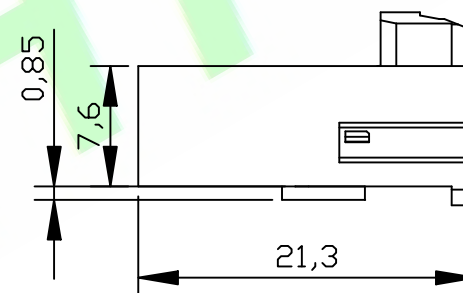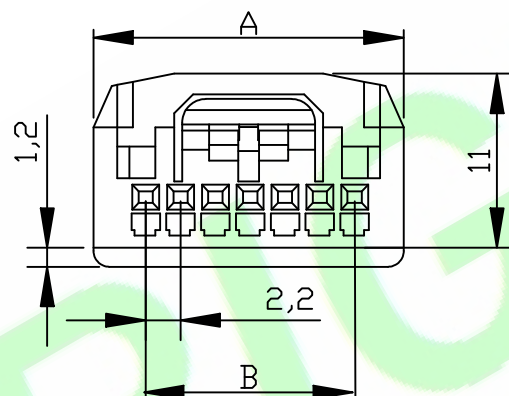

Poles	Dimensions(mm)	
	A	B
03	10.8	4.4
05	15.2	8.8
07	19.6	13.2

				DR.BY.: Kang		GENERAL TOLERANCE:		PART NO : H2201M-XXP-01-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
				CHKD.: Tony		LINEAR	ANGLES	DWG. NO.:				
						APPD.: Billy		X.: X.X: ±0.30	X': ±5.0° X.X': ±3.0°	TITLE : 2.2 mm HOUSING Connector		SHEET: 1/1
				X.XX: ±0.20	X.XX': ±2.0°			SCALE: 1:1				
1X	ORIGINAL	Kang		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 23-May-2023		UNIT: mm	THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO.									