


Specifications:
Material: Copper alloy
Wire Range: 0.75~2.0mm²
Operating Temperature Range: -40°~+105°C

Ordering Information
H22300TFP-PX-0X

1 2 3 4 5

- 1: — Series No.
2: — TF: Female Terminal
3: — P: Power supply Pin
4: — Q: Tin Plated
M: 15u" Gold on contact
5: — 1: Wire Range 0.75~1.25mm²
2: Wire Range 1.25~2.0mm²
3: Wire Range 0.35~0.5mm²

PART NO	A±0.4	B	C±0.4	D	E
H22300TFP-PX-01	4.50	(3.9)	3.0	(2.9)	(4.0)
H22300TFP-PX-02	4.50	(3.9)	4.5	(4.05)	(4.0)
H22300TFP-PX-03	3.60	(3.19)	2.30	(2.19)	(3.0)

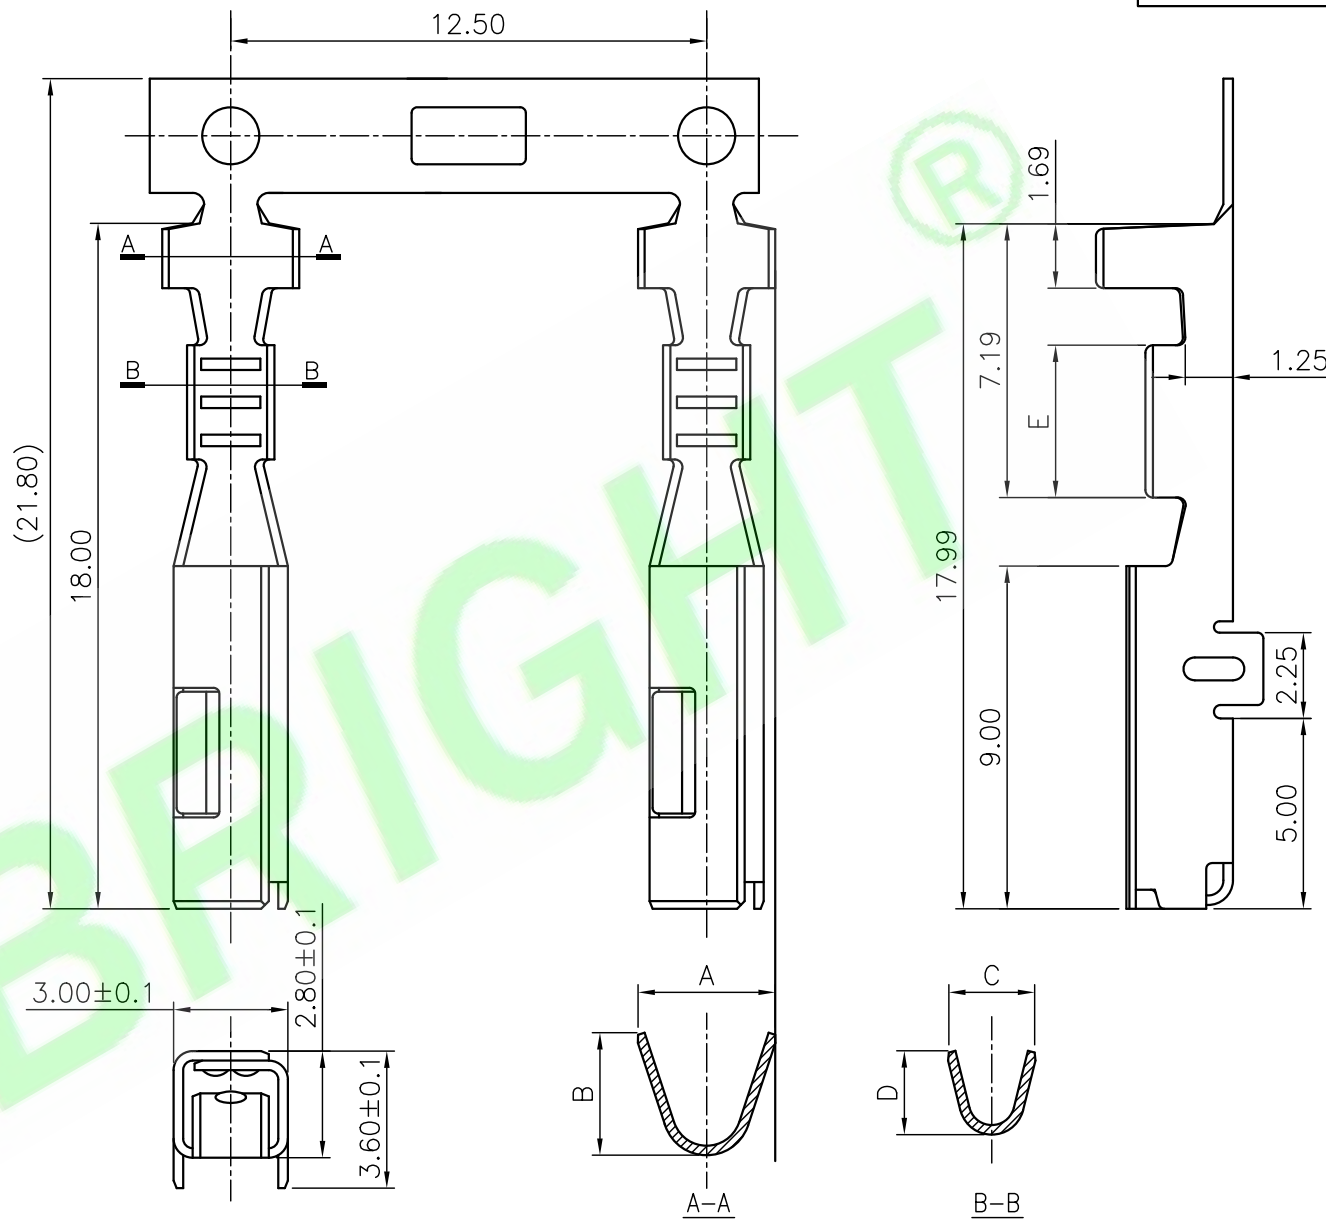

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H22300TFP-PX-0X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	THIRD ANGLE PROJECTION	A4
4X				Hu.CH	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.50	X': ±6.0°	TITLE :	0.64 REC Terminal		SCALE: 1:1		
2X	Add New Options	Zolin	20241227	Hu.CH	X.X: ±0.30	X.X': ±3.0°				UNIT: mm		
1X	Original	Hu.CH		APPD.:	X.XX: ±0.20	X.XX': ±2.0°		DATE: 04-Jun-2021				
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	X.XXX: ±0.10	X.XXX': ±2.0°						