

Specifications:

Material: Copper alloy

Wire Range: 0.75~2.0mm²

Operating Temperature Range: -40°~+105°C

Ordering Information

H22300TFP-PX-0X

1 2 3 4 5


1: — Series No.

2: — TF: Female Terminal

3: — P: Power supply Pin

4: — Q: Tin Plated

M: 15u" Gold on contact

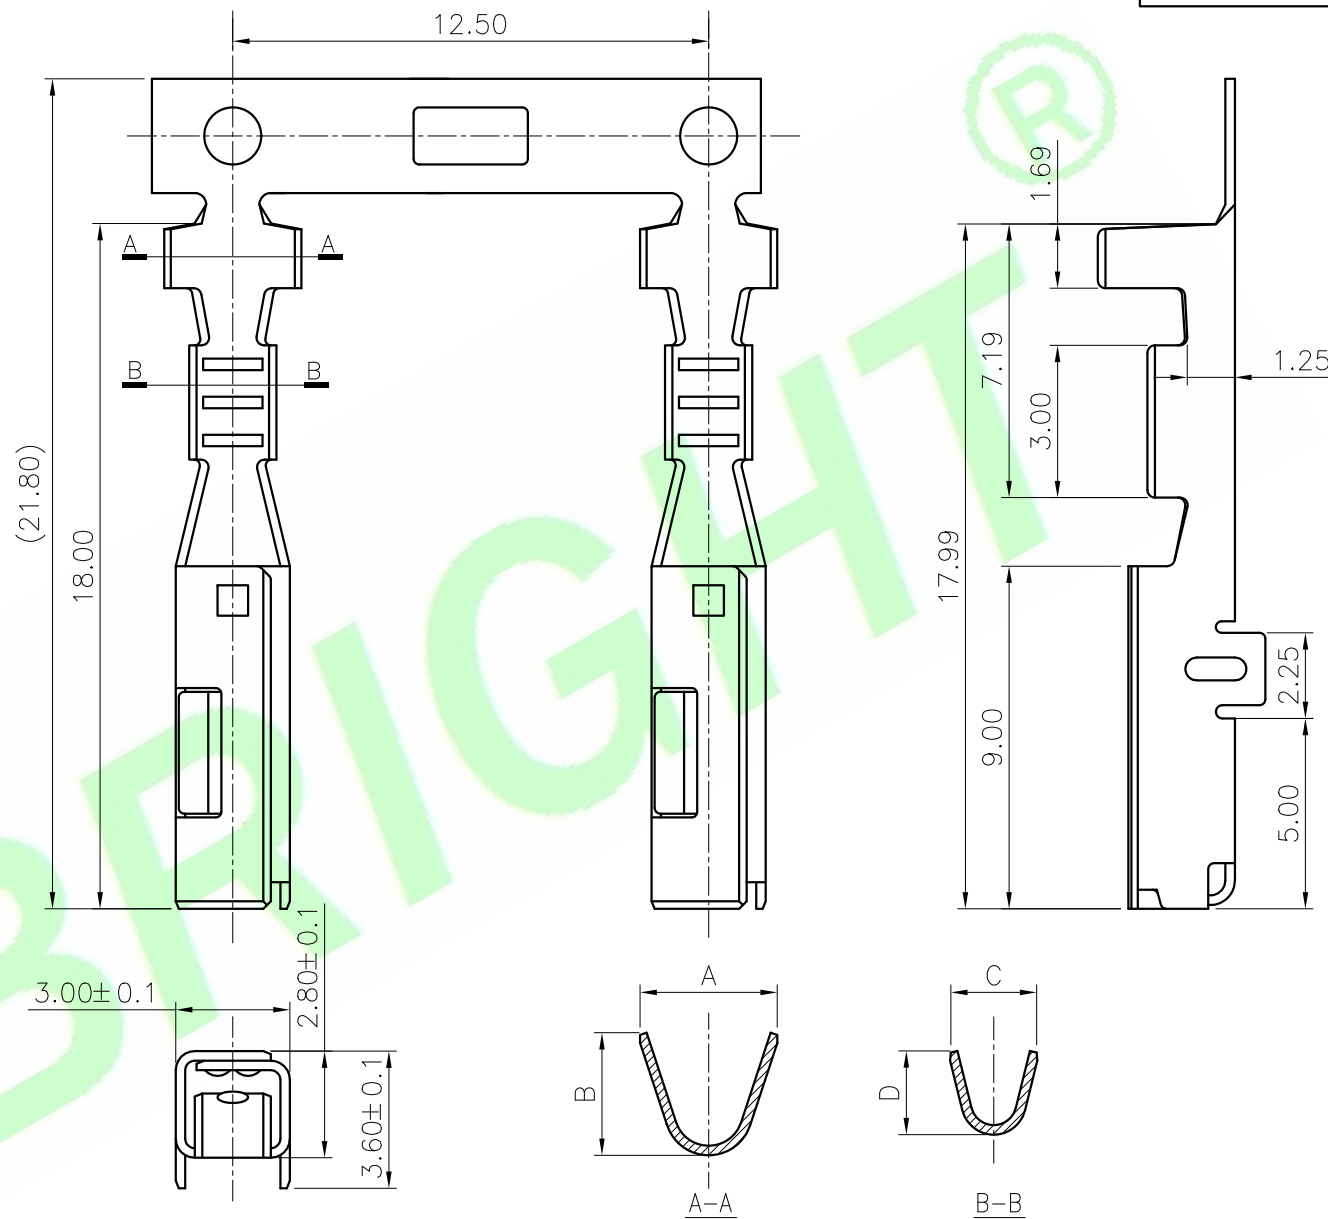5: — 1: Wire Range 0.75~1.25mm²2: Wire Range 1.25~2.0mm²3: Wire Range 0.35~0.5mm²

PART NO	A±0.4	B	C±0.4	D
H22300TFP-PX-01	4.50	(3.9)	3.0	(2.9)
H22300TFP-PX-02	4.50	(3.9)	4.5	(4.05)
H22300TFP-PX-03	3.60	(3.19)	2.30	(2.19)


3X	Optimize the drawing	JoinZm	20251009
2X	Add New Options	Zolin	20241227
1X	Original	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Hu.CH	GENERAL TOLERANCE:	
CHKD.: Hu.CH	LINEAR	ANGLES
APPD.: Billy	X.: ±0.50	X': ±6.0°
	X.X: ±0.30	X.X': ±3.0°
	X.XX: ±0.20	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±2.0°

PART NO : H22300TFP-PX-0X
DWG. NO.:
TITLE : 0.64 REC Terminal
DATE: 04-Jun-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4