

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color: Nature

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1000V AC/Minute

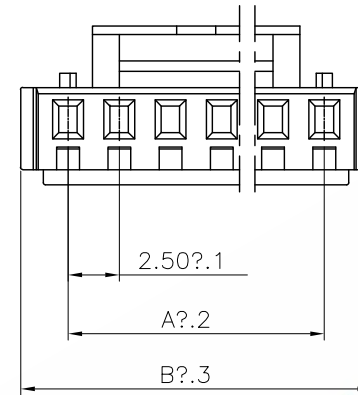

2-3PIN

6PIN-15PIN

Ordering Information


H2500-XXP-01-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

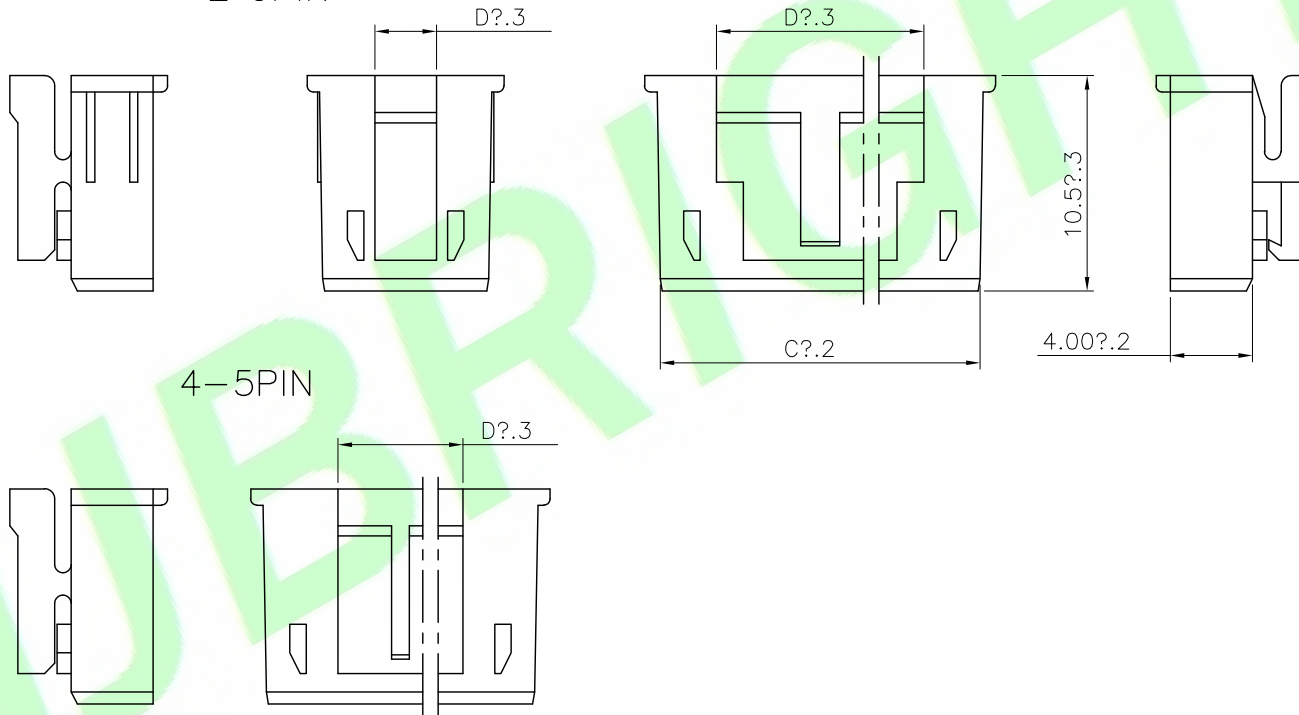

Pin	Dimension mm			
	A	B	C	D
02	2.50	7.00	5.70	3.00
03	5.00	9.50	8.10	3.00
04	7.50	12.00	10.60	5.00
05	10.00	14.50	13.10	6.00
06	12.50	17.00	15.60	10.00
07	15.00	19.50	18.10	11.00
08	17.50	22.00	20.60	12.00
09	20.00	24.50	23.10	13.00
10	22.50	27.00	25.60	14.00
11	25.00	29.50	28.10	15.00
12	27.50	32.00	30.60	16.00
13	30.00	34.50	33.10	17.00
14	32.50	37.00	35.60	18.00
15	35.00	39.50	38.10	19.00


5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H2500-XXP-01-A
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Aren	X.: ±0.30	X': ±5.0°	TITLE :
2X					X.X: ±0.20	X.X': ±3.0°	2.50mm Pitch Housing
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 24-Apr-2019
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4