

Specifications:

Material And Finish:

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 5.5Amp AC/DC Max (20AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$ Contact Resistance: $10\text{m}\Omega$ MaxInsulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information

H25000T-PXQ

1 2 3 4

1: Series No.

2: T: Terminal


3: P1: AWG20~22

P2: AWG24~26

4: Plated:


Q: Tin Plated

Part No.	Wire range	Dim. A	Dim. B	Dim. C	Dim. D
A25000T-P1Q	AWG20~22	1.39	1.45	2.12	2.00
A25000T-P2Q	AWG24~26	1.80	1.85	2.33	1.94

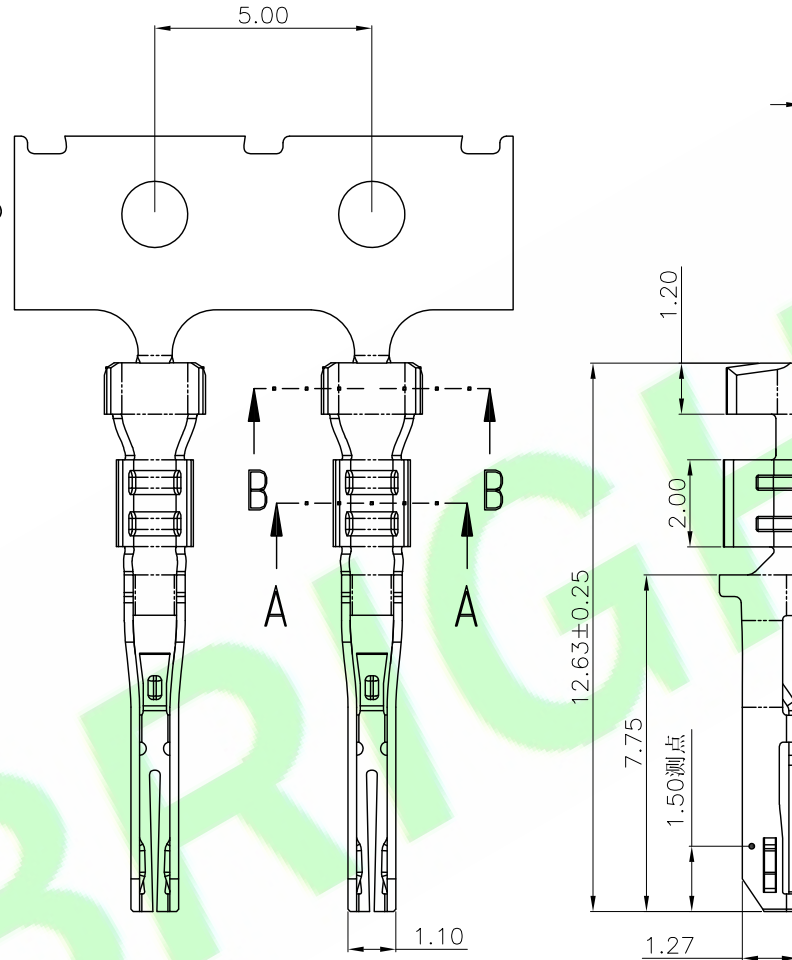

SEC. A-A

SEC. B-B

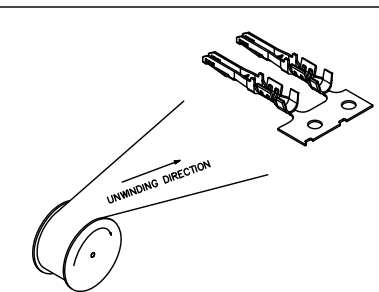

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25000T-PXQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Mark	X.:	X': ±5.0°	TITLE : 2.50mm Pitch Crimping Terminal		SHEET: 1/1			A4
2X					X.X: ±0.25	X.X': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 16-Jul-2019		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.08	X.XXX': ±1.0°						