
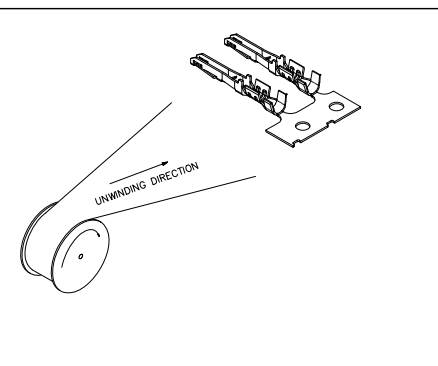


Specifications:
 Material And Finish:
 Contact: Copper alloy
 Plated: See Ordering Information

Rating:
 Current Rating: 5.5Amp AC/DC Max (20AWG)
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -40°C ~ +125°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute

Ordering Information
 H25000T-PXQ
 1 2 3 4

- 1: Series No.
- 2: T: Terminal
- 3: P1: AWG20~22
P2: AWG24~26
- 4: Plated:
Q: Tin Plated

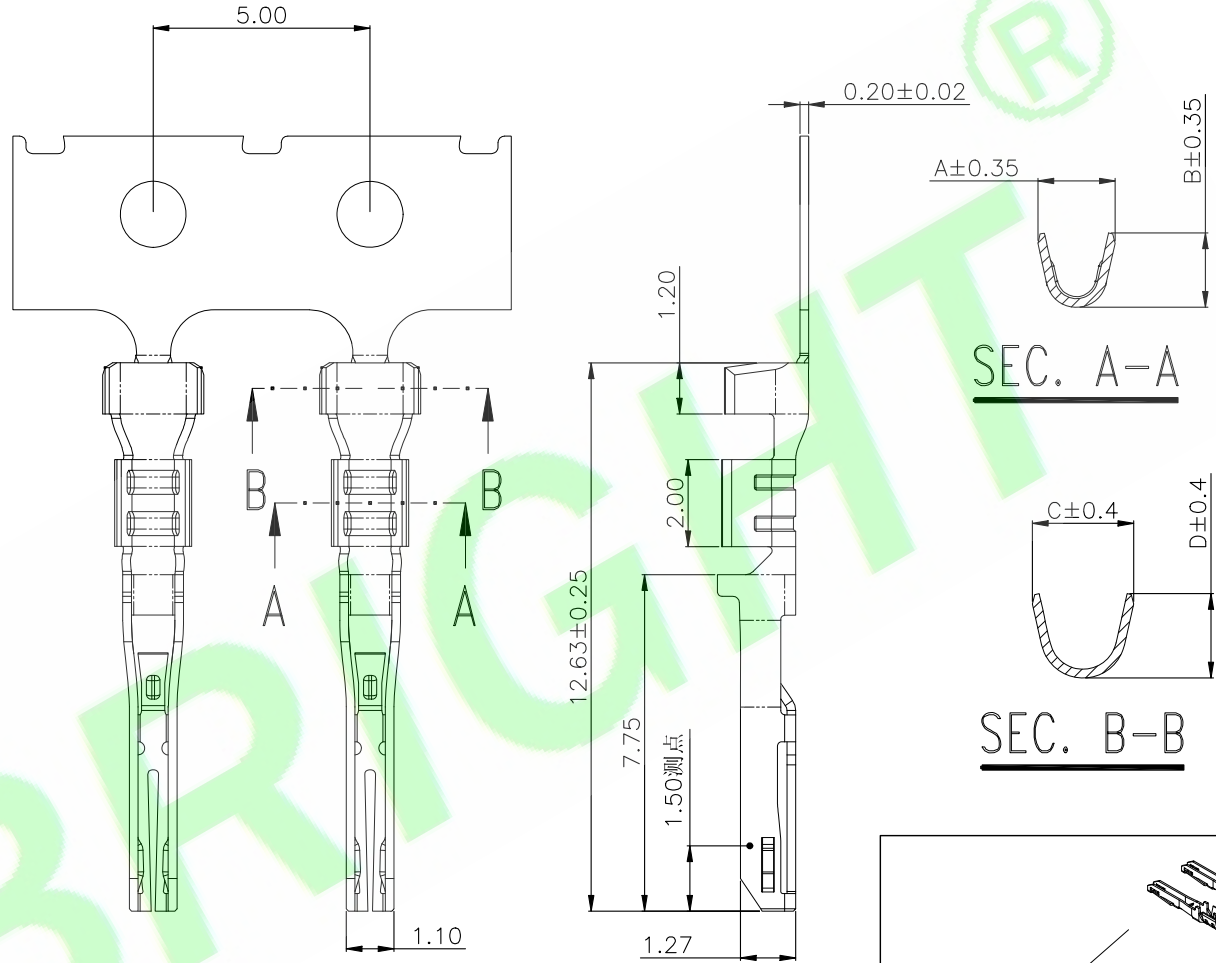

Part No.	Wire range	Dim.A	Dim.B	Dim.C	Dim.D
H25000T-P1Q	AWG20~22	1.80	1.85	2.33	1.94
H25000T-P2Q	AWG24~26	1.39	1.45	2.12	2.00

2X

2X	Correction of list size order	Judyyan	20260519
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY: Judyyan	GENERAL TOLERANCE:		PART NO : H25000T-PXQ
CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.25	X': ±5.0°	TITLE :
	X.X: ±0.15	X.X': ±3.0°	2.50mm Pitch Crimping Terminal
	X.XX: ±0.08	X.XX': ±2.0°	DATE: 16-Jul-2019
	X.XXX: ±0.08	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4