

Specifications:

Material:
Insulator: PA66 UL94V-0

Rating:

Current Rating: 3.0 Amp
Voltage Rating: 250V AC/DC
Operating Temperature Range: -25~+85°C

Electrical:





Contact resistance: 20m Ohm Max
Insulator resistance: 500M ohm min.
Withstanding Voltage: 1500V AC/Minute

Waterproof grade: IP65

Ordering Information

H25016-02P-01-B
1 2 3

- 1: — Series No.
- 2: — No. of Positions
- 3: — B: Black

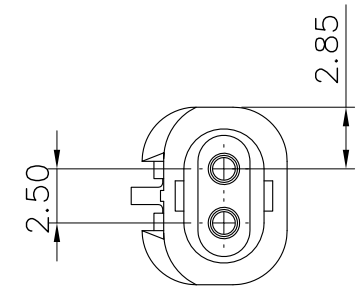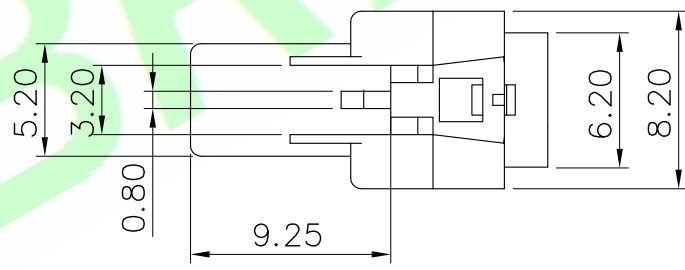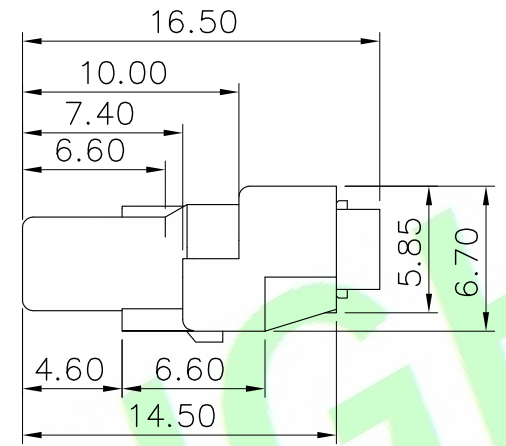

5X				DR.BY.:	Mark	GENERAL TOLERANCE:	PART NO : H25016-02P-01-B	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.:	Tony	LINEAR	DWG. NO.:		
3X				APPD.:	Billy	10 UNDER ±0.2	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION
2X	ORIGINAL	Mark				10 OVER 30 UNDER ±0.5	2.50mm Pitch Housing suite	SCALE: 1:1	
1X						30 UNDER ±0.3	DATE: 21-Feb-2022	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			ANGULAR ±3°			A4