


Specifications:
Material:
 Insulator: PA66 UL94V-0

Rating:
 Current Rating: 3.0 Amp
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -25~+85°C

Electrical:
 Contact resistance: 20m Ohm Max
 Insulator resistance: 500M ohm min.
 Withstanding Voltage: 1500V AC/Minute
 Waterproof grade: IP65

Ordering Information
H25016-02P-B

- 1: —Series No.
- 2: —No. of Positions
- 3: —B: Black

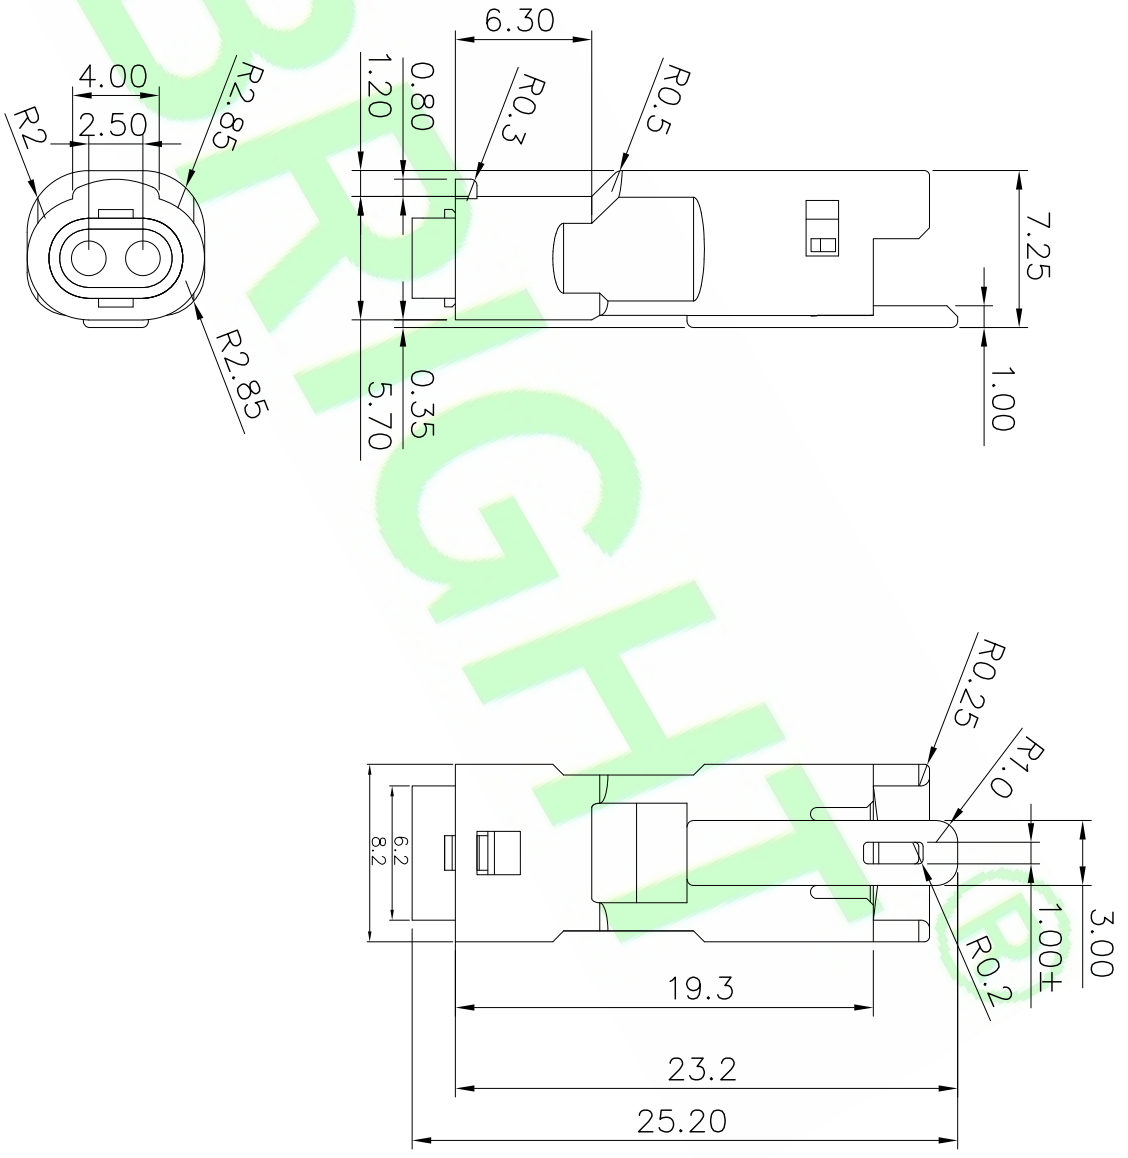

5X		DR.BY:	Mark	GENERAL TOLERANCE:	PART NO. : H25016-02P-B				
4X				LINEAR	DWG. NO.:				
3X				10 UNDER ±0.2	TITLE :	2.50mm Pitch Housing			
2X				10 OVER 30 UNDER ±0.5	DATE: 21-Feb-2022				
1X	ORIGINAL	DR.BY	Mark	30 UNDER ±0.3					
REV.	DESCRIPTION		DR.BY	ANGULAR ±3°					
1			Billy						
2									
3									
4									
5									
6									
7									
8									

HBRIGHT 东莞市华晶电子有限公司
 BRIGT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm
 THIRD ANGLE PROJECTION

A4