


Specifications:
 Material And Finish:
 Insulator:Copper alloy

Rating:
 Current Rating:4.0 Amp (20AWG)
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-55~+105°C

Electrical:
 Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute
 Wire Range:AWG#20~28
 Insulation O.D:1.60mm Max

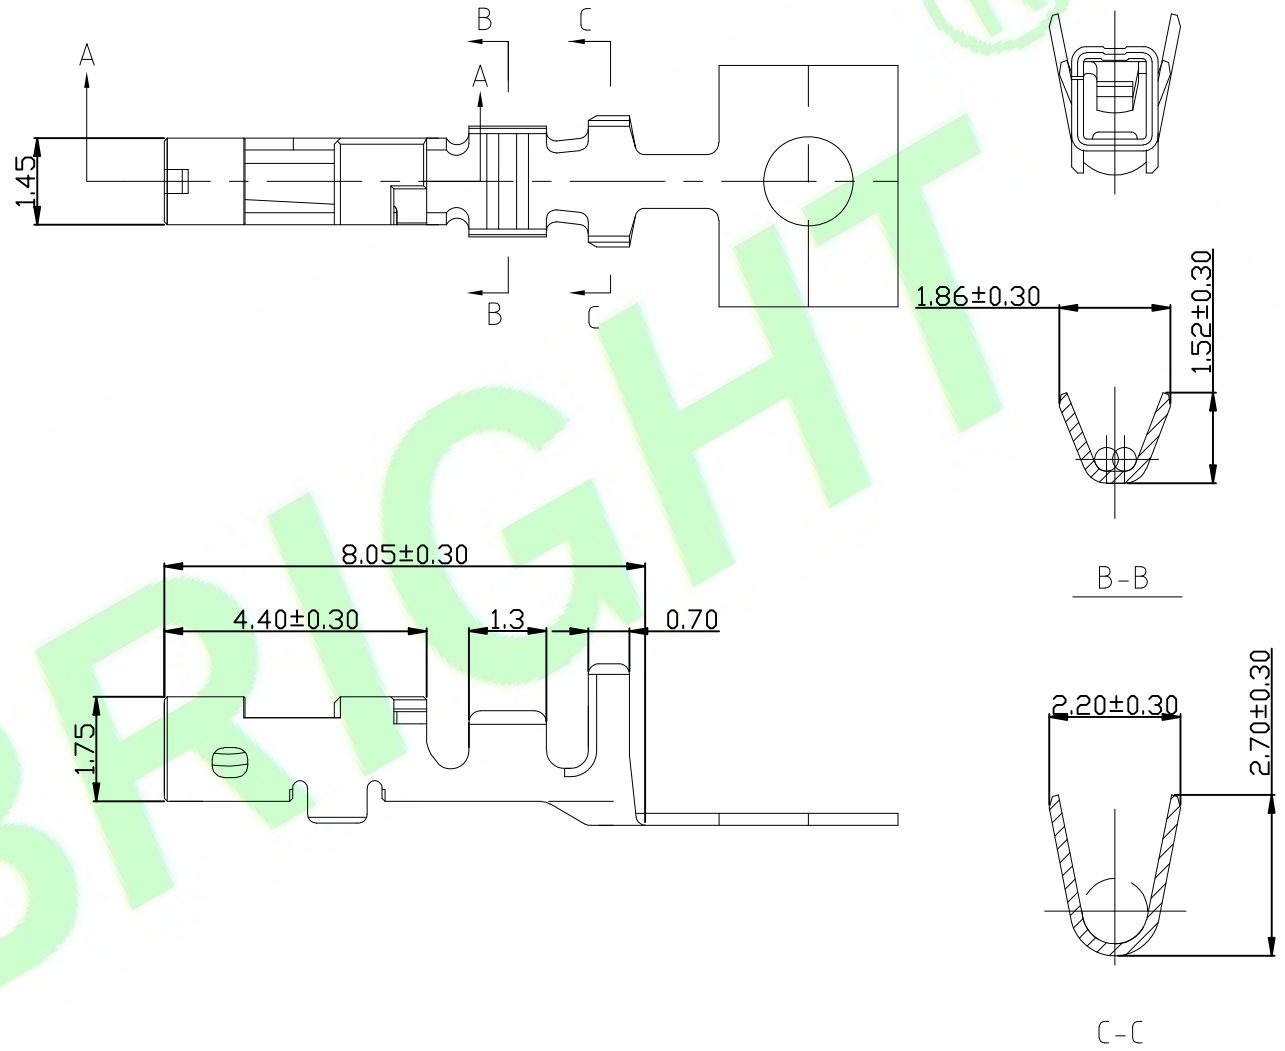

Ordering Information
 H25018T-PX
 1 2 3

- 1: — Series No.
- 2: — T:Terminal
- 3: — Q:Tin Plated
 M:15u" Gold on contact;Tin on tail

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H25018T-PX		HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :		SHEET: 1/1
2X				APPD.: Billy	x.x: ±0.25	x.x': ±3.0°	2.5mm Pitch Dynmic Terminal		SCALE: 1:1
1X	ORIGINAL	Judyyan			x.xx: ±0.20	x.xx': ±2.0°	DATE: 30-Sep-2021		UNIT: mm
REV	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx': ±1.0°			THIRD ANGLE PROJECTION

A4