
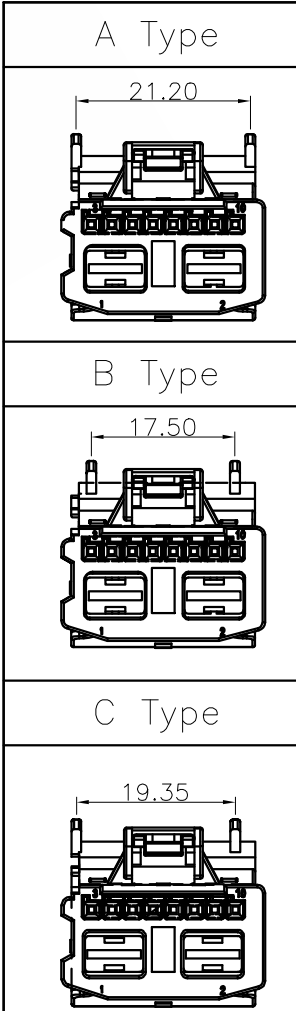


Specifications:
Material And Finish:
Insulator: PBT
Rating:
Current Rating: Signal Pin:5A
Power Pin:40A Max
Operating Temperature Range:-40~+125°C

Electrical:
Contact resistance: Signal Pin:20 Ohm Max
Power Pin:3 Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1000V AC/Minute


Ordering Information
H25020M-XXP-XX-A
1 2 3 4 5

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — 01:A Type Black
02:B Type Brown
03:C Type Green
- 5: — A:In Bag

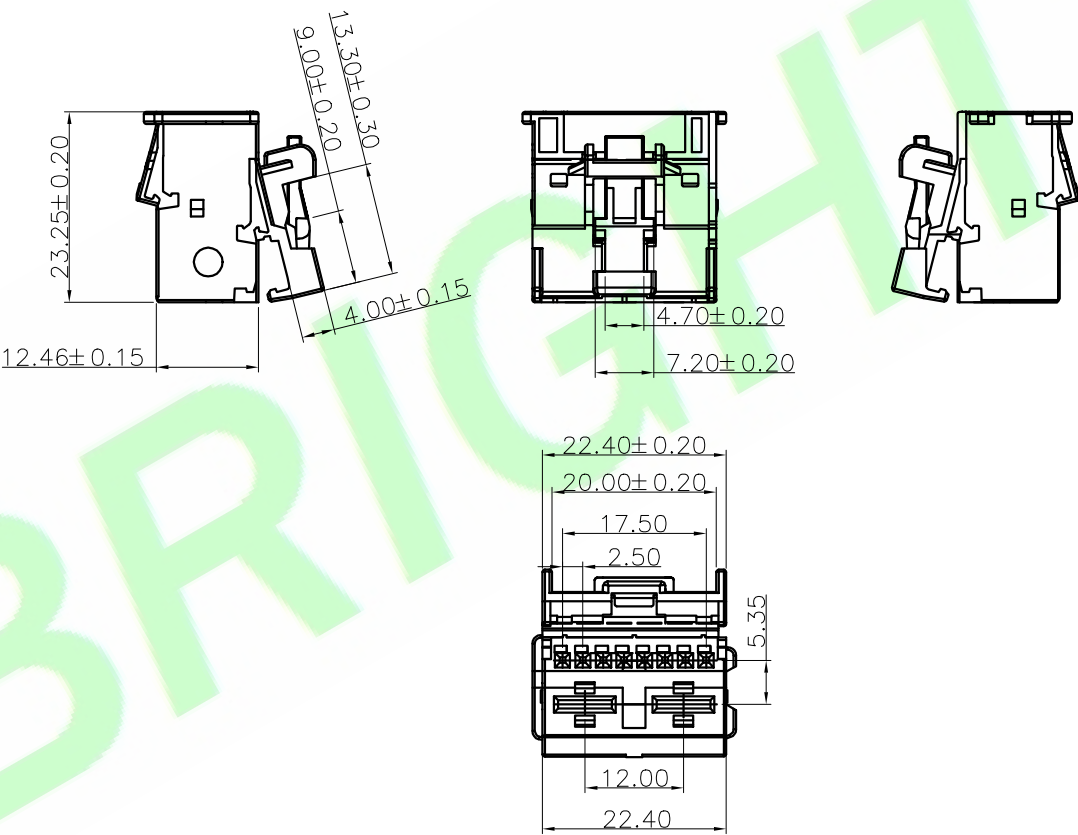

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H25020M-XXP-XX-A
	LINEAR	ANGLES	
CHKD.: Juddyan	X.: ±0.30	X': ±5.0'	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0'	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0'	TITLE : 2.50mm Pitch Male Housing
	X.XXX: ±0.10	X.XXX': ±1.0'	
			DATE: 27-Nov-2024

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		