

RoHS Compliant






Specifications:
Material And Finish:
Insulator: Polyester

Rating:
Current Rating:3 Amp Max
Voltage Rating:250V AC/DC
Operating Temperature Range:-40~ +105℃

Electrical:
Contact resistance:10mhm Max
Insulator resistance:250M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
H25021F-XXP-01-XA
1 2 3 45

- 1: — Series No.
- 2: — F:Female Housing
- 3: — No. of Positions
- 4: — B:Black
N:Natural
- 5: — A:In Bag

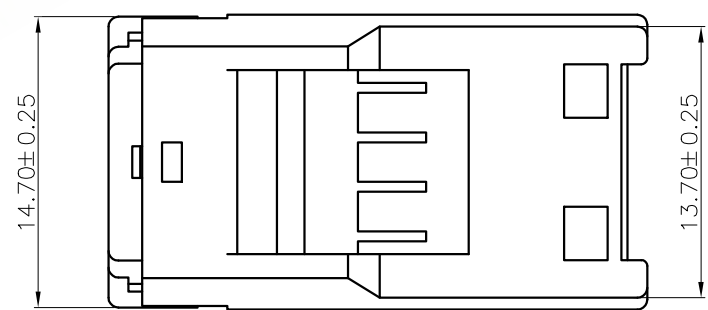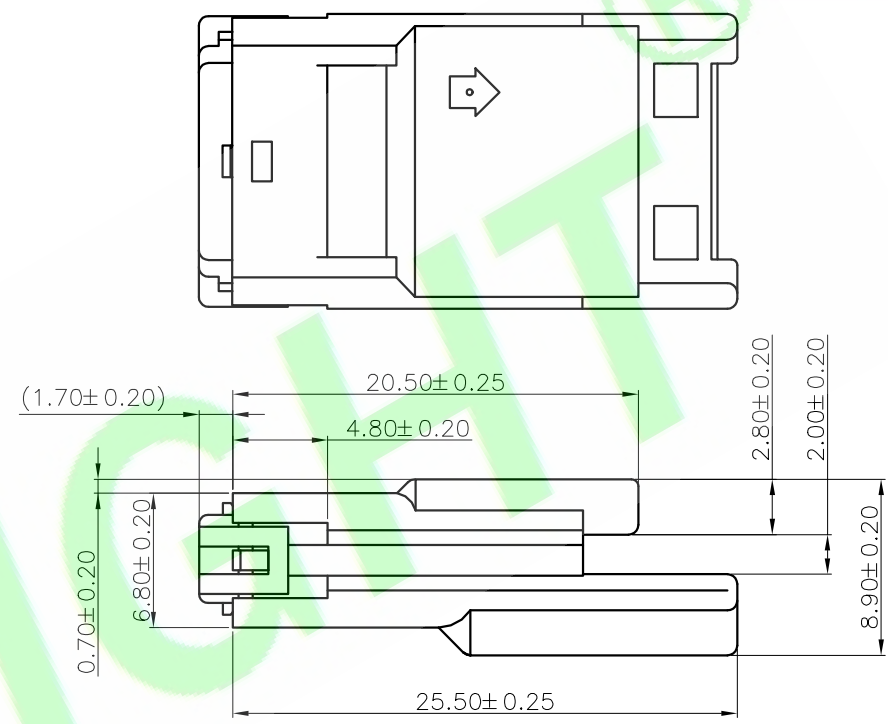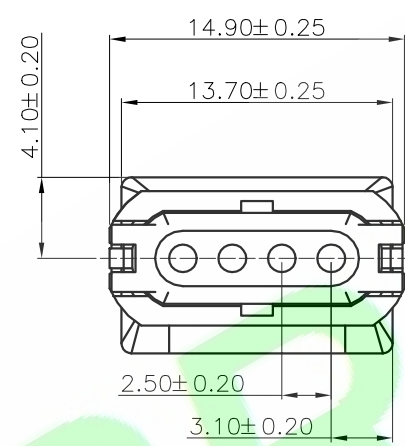

				DR.BY.: JoinZm		GENERAL TOLERANCE:		PART NO : H25021F-XXP-01-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Juddyan		LINEAR	ANGLES	DWG. NO.:							
				APPD.: Billy		x.: ±0.30	x': ±5.0°	TITLE : 2.50mm Pitch Female Housing		SHEET: 1/1				A4	
						x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1					
						x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm					
						x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 20-Dec-2024							
1X	ORIGINAL		JoinZm												
REV.	DESCRIPTION		DR.BY	ECN.	NO										
	1		2		3		4		5		6		7		8