

RoHS Compliant






Specifications:
Material And Finish:
Insulator: Polyester

Rating:
Current Rating:3 Amp Max
Voltage Rating:250V AC/DC
Operating Temperature Range:-40~ +105°C

Electrical:
Contact resistance:10mhm Max
Insulator resistance:250M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
H25021M-XXP-01-XA
1 2 3 45

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — B:Black
N:Natural
- 5: — A:In Bag

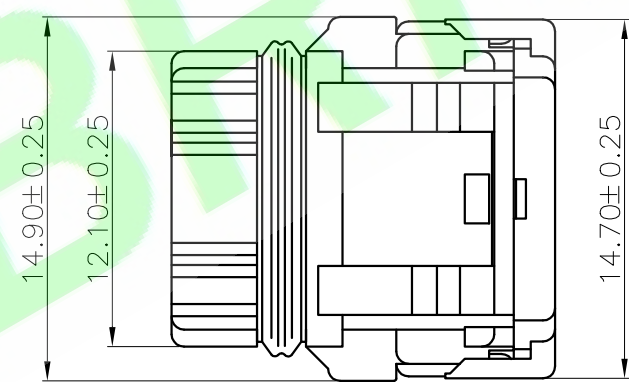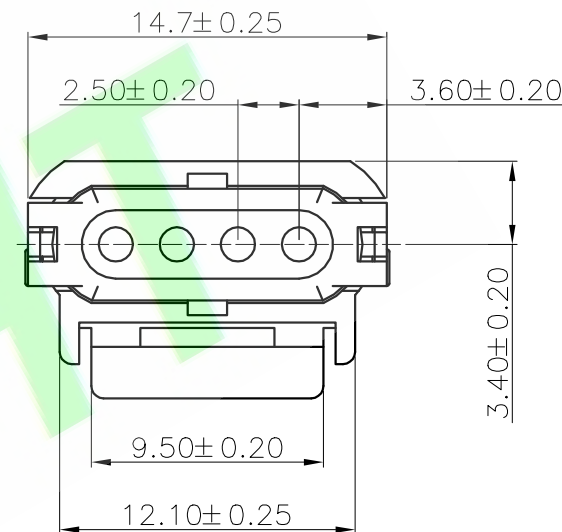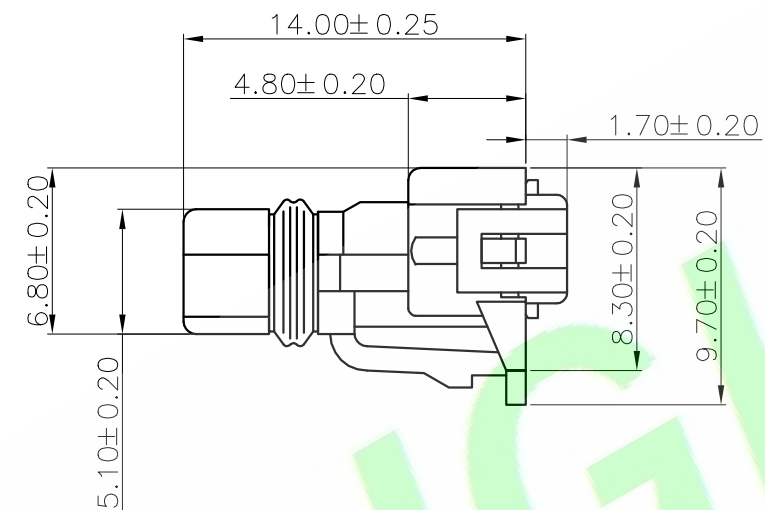

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H25021M-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
	LINEAR	ANGLES					DWG. NO.:
CHKD.: Juddyan	x.: ±0.30	x°: ±5.0°	TITLE : 2.50mm Pitch Male Housing	SHEET: 1/1			A4
	x.x: ±0.20	x.x°: ±3.0°		SCALE: 1:1			
APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 20-Dec-2024	UNIT: mm			
	x.xxx: ±0.10	x.xxx°: ±1.0°					

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO

A4