

Specifications:

Material And Finish:

Insulator:Nylon 66 UL94V-0
Color:Natural

Rating:

Current Rating:3.0 Amp (22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C



Electrical:

Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V DC/Minute


Ordering Information

H2505-XXP-XA




- 1: Series No.
2: No. of Positions
3: N:Natural
B:Black
R:Red
Y:Yellow
BL:Blue
GN:Green
4: A:In Bag

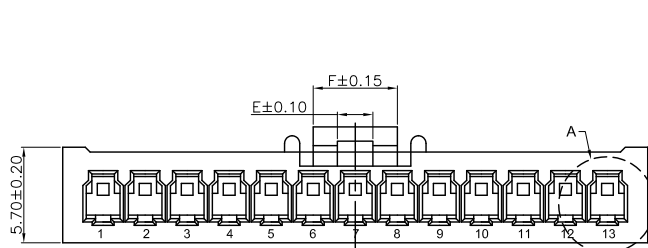


A
2:1



2~4P

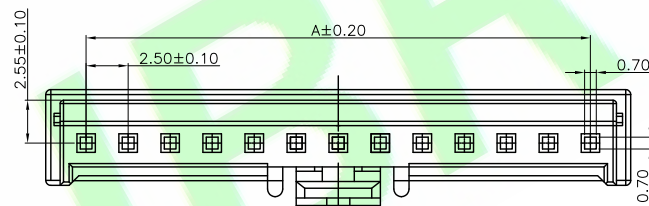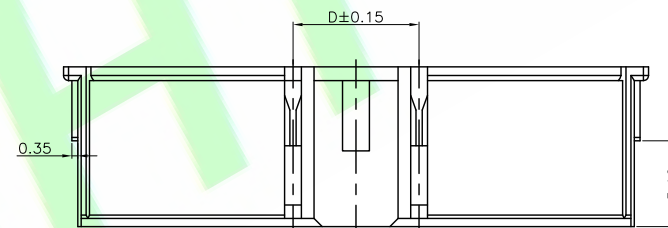



5~15P



D-D

Poles	DiFensions (FF)					
	A	B	C	D	E	F
2P	--	7.30	5.60	4.90	1.15	2.90
3P	5.00	9.80	8.10	7.00	2.05	4.40
4P	7.50	12.30	10.60	7.50	2.05	5.00
5P	10.00	14.80	13.10	7.50	2.05	5.00
6P	12.50	17.30	15.60	7.50	2.05	5.00
7P	15.00	19.80	18.10	7.50	2.05	5.00
8P	17.50	22.30	20.60	7.50	2.05	5.00
9P	20.00	24.80	23.10	7.50	2.05	5.00
10P	22.50	27.30	25.60	7.50	2.05	5.00
11P	25.00	29.80	28.10	7.50	2.05	5.00
12P	27.50	32.30	30.60	7.50	2.05	5.00
13P	30.00	34.80	33.10	7.50	2.05	5.00
14P	32.50	37.30	35.60	7.50	2.05	5.00
15P	35.00	39.80	38.10	7.50	2.05	5.00



5X				DR.BY.: Ken	GENERAL TOLERANCE:		PART NO : H2505-XXP-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Mark	x.: ±0.30	x': ±5.0°	TITLE : 2.5mm Pitch Housing				
2X					x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Ken		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 21-Jul-2022		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
							UNIT: mm		THIRD ANGLE PROJECTION		

A4