






Specifications:
 Material: Phosphoric Bronze
 Applicable wire sizes: AWG#22~28#

Rating:
 Current Rating: 3.0 Amp (22AWG)
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -40~+105°C

Electrical:
 Contact resistance: 10m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 1000V AC/Minute

Ordering Information
H2505T-PX
 1 2 3

- 1: Series No.
- 2: T: Terminal
- 3: A: Gold flash
Q: Plated Tin

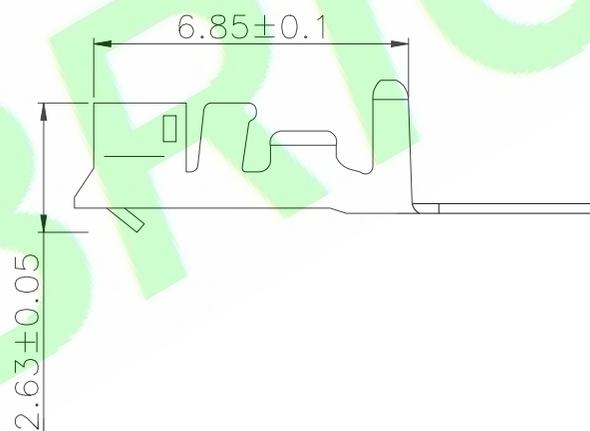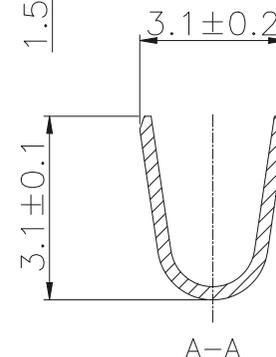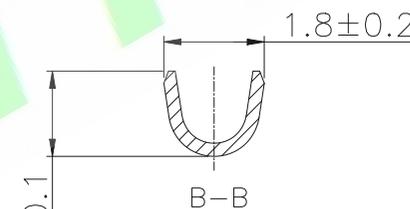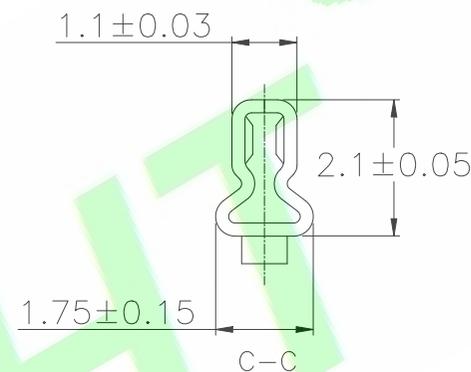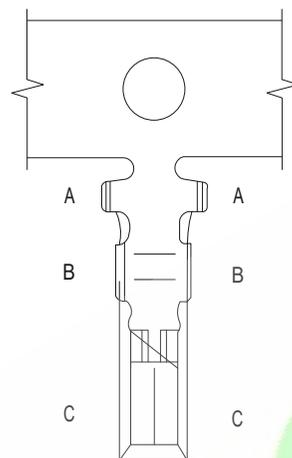

DR.BY.: Yawen	GENERAL TOLERANCE:		PART NO : H2505T-PX
	LINEAR	ANGLES	
CHKD.: Juddyan	x.: ±0.30	x': ±5.0°	DWG. NO.:
	x.x: ±0.20	x.x': ±3.0°	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	TITLE : H2505 Terminal
	x.xxx: ±0.10	x.xxx': ±1.0°	
DATE: 9-Feb-2026			

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Yawen	
REV.	DESCRIPTION	DR.BY	ECN. NO