

Specifications:
Material: Phosphoric Bronze
Applicable wire sizes: AWG#22~28#

Rating:
Current Rating: 3.0 Amp (22AWG)
Voltage Rating: 250V AC/DC
Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Electrical:
Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1000V AC/Minute

Ordering Information

H2506T-PX

1 2 3

- 1: — Series No.
2: — T: Terminal
3: — A: Gold flash
Q: Plated Tin

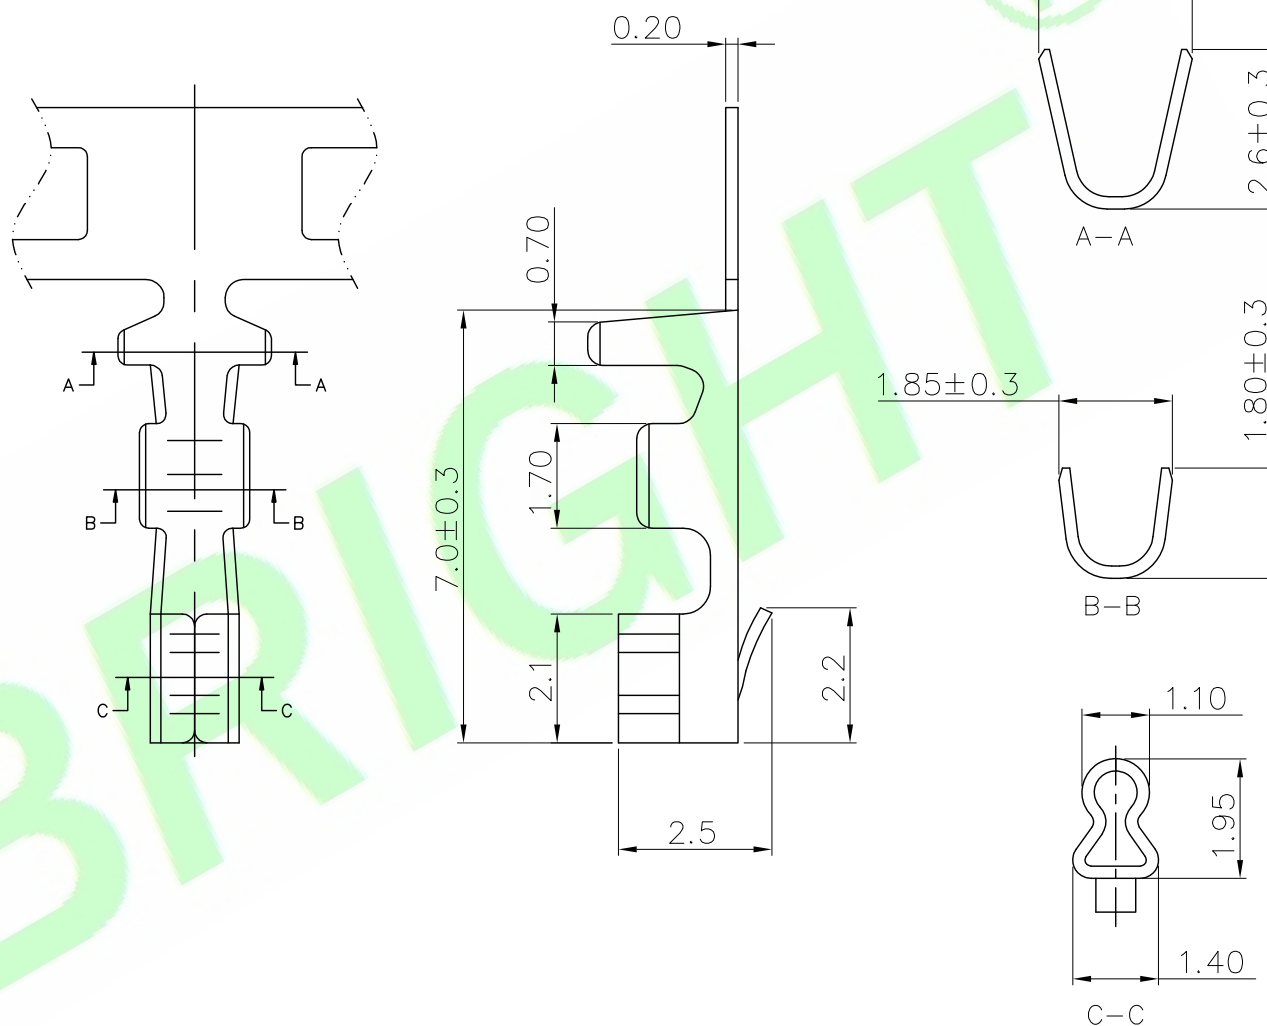

5X				DR.BY.:	Judyyan	GENERAL TOLERANCE:		PART NO : H2506T-PX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	Aren	x.: ±0.30	x': ±5.0°	TITLE : 2.50mm Pitch Terminal		SHEET: 1/1		A4	
2X						x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.:	Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 21-Jul-2022		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10	x.xxx': ±1.0°						