

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Plated:See Ordering Information

Rating:

Current Rating:3.0Amp (22AWG)

Voltage Rating:250V AC/DC





Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

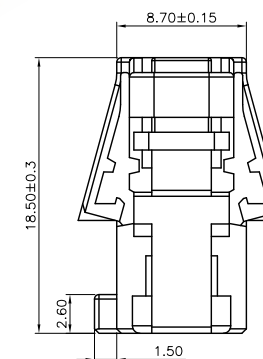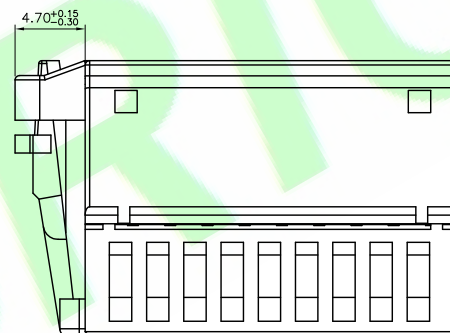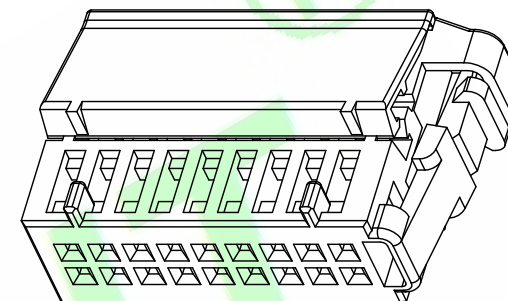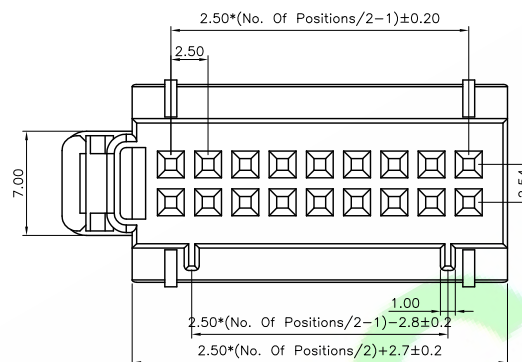

Ordering Information

H25082-XXP-01-X

1 2 3

1:— Series No.

2:— No. of Positions

3:— A:In Bag

C:In Tray

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : H25082-XXP-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±5.0°	TITLE : 2.50*2.54mm 线端母座	SHEET: 1/1 SCALE: 1:1  THIRD ANGLE PROJECTION			
2X					x.x: ±0.25					x.x': ±3.0°
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15					x.xx': ±2.0°
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 19-Apr-2016	UNIT: mm		