

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Plated:See Ordering Information

Rating:

Current Rating:3.0Amp (22AWG)

Voltage Rating:250V AC/DC

OperatingTemperatureRange:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information







H25083-XXP-01-X
1 2 3


1:— Series No.

2:— No. of Positions

3:— A:In Bag

C:In Tray

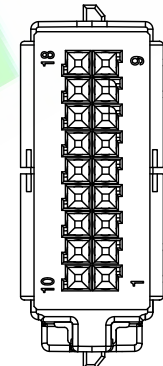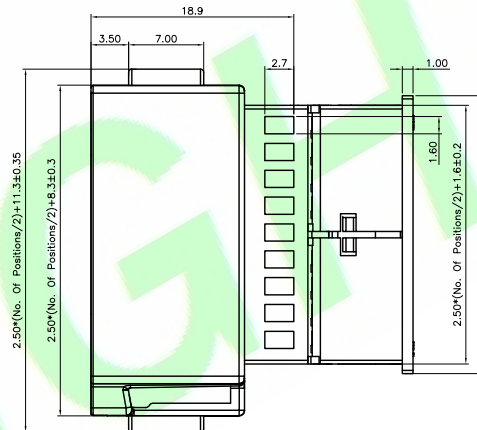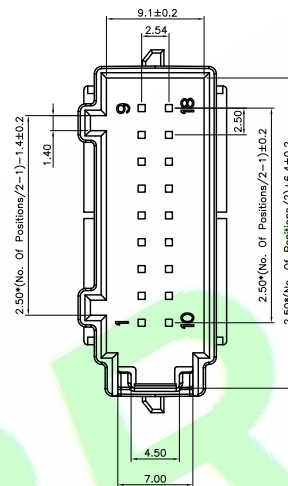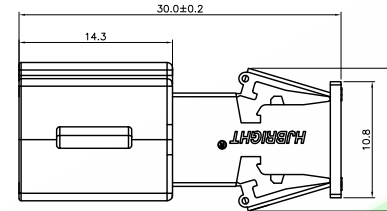

5X				DR.BY.: samson	GENERAL TOLERANCE:	PART NO : H25083-XXP-01-X	HJBRIGHT® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR ANGLES	DWG. NO.:		
3X				CHKD.: tony	X.: ± X': ±5.0°	TITLE : 2.50*2.54mm New public seat	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X				APPD.: Billy	X.X: ±0.25 X.X': ±3.0°	DATE: 25-Feb-2017	SCALE: 1:1	
1X					X.XX: ±0.15 X.XX': ±2.0°		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10 X.XXX': ±1.0°			A4