

Specifications:

Material:

Insulator: PA66 UL94V-0

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$


Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

Female shell with male terminal


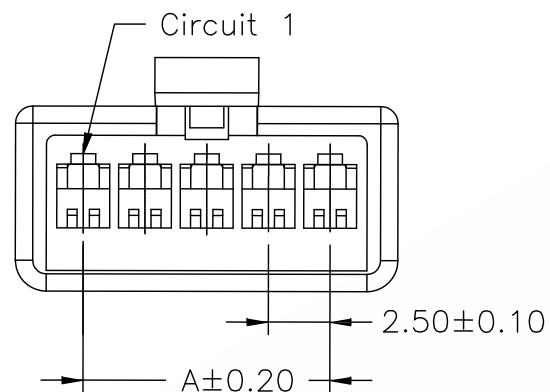


Ordering Information

H2513F-XXP-XA

1 2 3 4 5

- 1: — Series No.
2: — F: Female Housing
3: — No. of Positions
4: — W: White
B: Black
5: — A: Bag

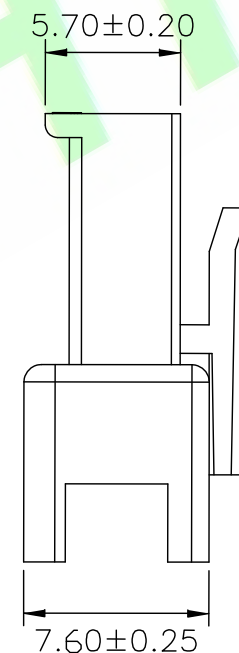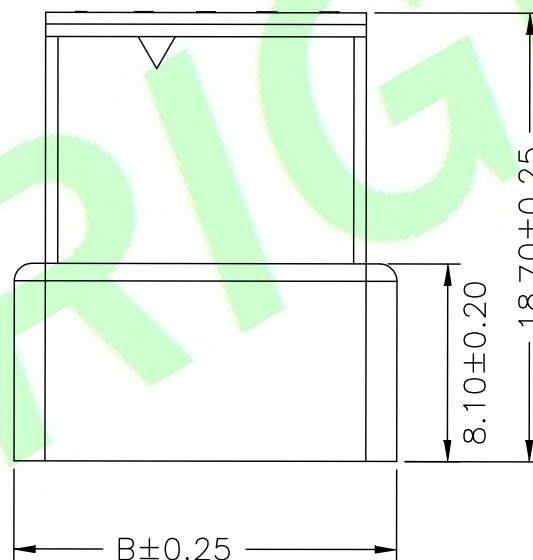

Circuits	Dimension mm	
	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50
15	35.00	38.00

5X			
4X			
3X			
2X	New code options	Judyyan	20220722
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Samson
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ± 0.30	X': $\pm 5.0^{\circ}$
X.X: ± 0.20	X.X': $\pm 3.0^{\circ}$
X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$
X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$

PART NO : H2513F-XXP-XA

DWG. NO.:

TITLE :

2.50mm Pitch Female Housing

DATE: 23-Oct-2013

HJBRIGHT®

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4