

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#22~28#

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

Male terminal with female plastic shell

Ordering Information

H2513TM-PQ


1 2 3 4

1: — Series No.

2: — T: Terminal

3: — M: Male

4: — Q: Plated Tin

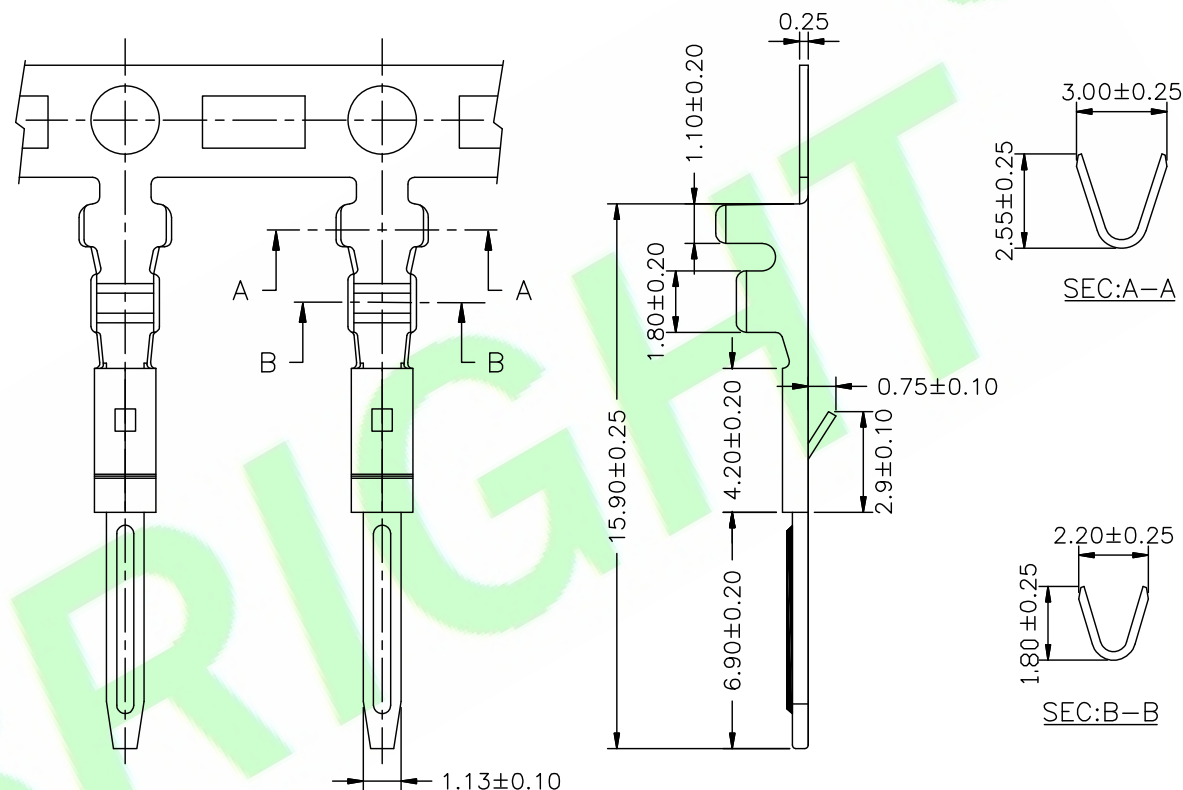

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H2513TM-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4									
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:											
3X					x.: ±0.30	x': ±5.0°	TITLE :											
2X	New code options	Judyyan	20220722	APPD.: Billy	x.x: ±0.20	x.x': ±3.0°	2.5mm Pitch Male terminal											
1X	ORIGINAL	Samson			x.xx: ±0.15	x.xx': ±2.0°	DATE: 23-Oct-2013											
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°												
1		2		3		4		5				6		7		8		