

Specifications:

Material:

Insulator:PA66 UL94V-0 Color:White

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact Resistance:20m ohm min.

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H25140AS-XXP-XXA

1 2 3 4 5 6

1:— Series No.

2:— S:Straight Type Housing

3:— No. of Positions

4:— L:PA66

C:LCP

G:PA9T

N:PA6T

5:— Color:




N:Natural

B:Black

6:— A:In Bag

B:In Tube

C:In Tray

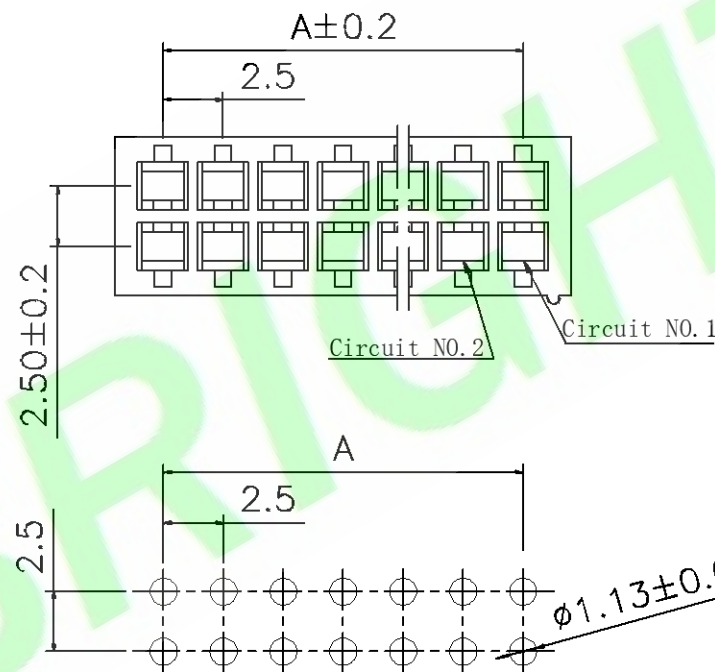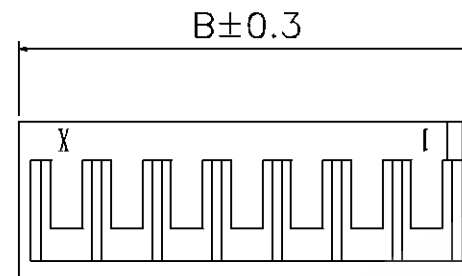

RECOMMENDED PCB LAYOUT

Circuits	Dimension mm	
	A	B
2X2	2.50	6.50
2X3	5.00	9.00
2X4	7.50	11.50
2X5	10.00	14.00
2X6	12.50	16.50
2X7	15.00	19.00
2X8	17.50	21.50
2X9	20.00	24.00
2X10	22.50	26.50
2X11	25.00	29.00
2X12	27.50	31.50
2X13	30.00	34.00
2X14	32.50	36.50
2X15	35.00	39.00
2X16	37.50	41.50
2X17	40.00	44.00
2X18	42.50	46.50
2X19	45.00	49.00
2X20	47.50	51.50

5X				DR.BY:	Judyyan	GENERAL TOLERANCE:		PART NO : H25140AS-XXP-XXA		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	Aren	x: ±0.30	x': ±5.0°	TITLE :		SHEET: 1/1	 THIRD ANGLE PROJECTION
2X						x.x: ±0.20	x.x': ±3.0°	2.50mm Pitch Straight Type Housing		SCALE: 1:1	
1X	ORIGINAL	Judyyan		APPD.:	Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 3-Feb-2021		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10	x.xxx': ±1.0°				A4