

Specifications:**Material:**

Insulator: PA66 UL94V-0 Color: Black

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 20m Ohm Max





Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

Waterproof grade: IP65

Ordering InformationH2516M-02P-01-A
1 2 3 4

- 1: — Series No.
2: — M: Male Housing
3: — No. of Positions
4: — A: In Bag

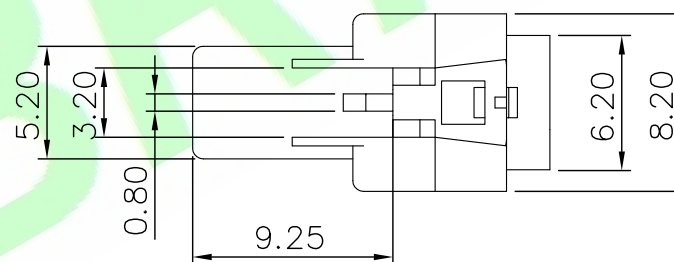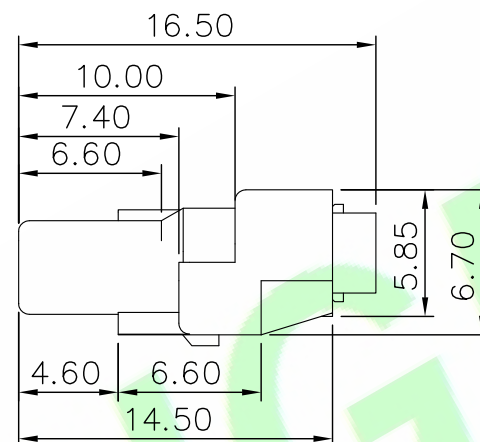

5X				DR.BY.:	GENERAL TOLERANCE:	PART NO : H2516M-02P-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Mark	LINEAR	DWG. NO.:				
3X				CHKD.:	10 UNDER ±0.2	TITLE : 2.50mm Pitch Housing suite Male	SHEET: 1/1		A4	
2X	Update Code options	Judyyan	20221221	Tony	10 OVER 30 UNDER ±0.5		SCALE: 1:1			
1X	ORIGINAL	Mark		APPD.:	30 UNDER ±0.3		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	ANGULAR ±3°	DATE: 21-Feb-2022	THIRD ANGLE PROJECTION			