

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#20, #22

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC


Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

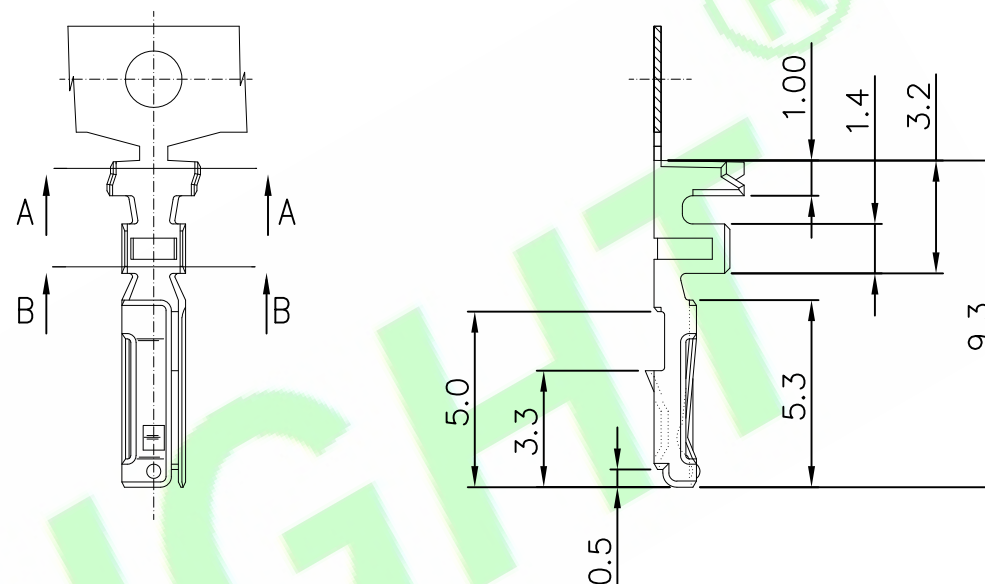

Ordering Information


H2516TF-PX

1 2 3


1: — Series No.

2: — TF: Female Terminal


3: — Q: Plated Tin

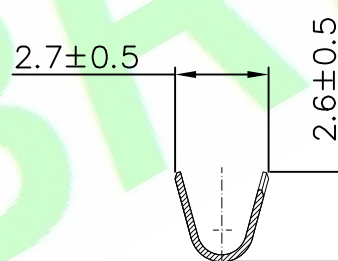

SECT. A-A

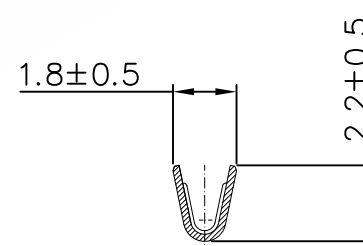

SECT. B-B

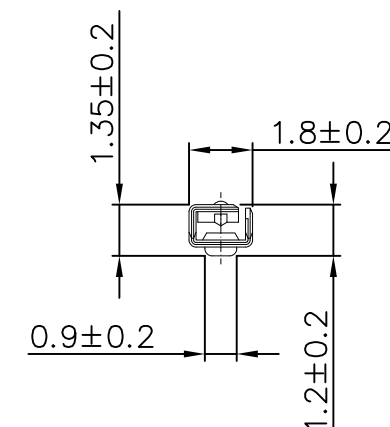

5X				DR.BY:		GENERAL TOLERANCE:	PART NO : H2516TF-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				Mark		LINEAR	DWG. NO.:		
3X				CHKD.:		ANGLES	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update Code options	Judyyan	20221221	Tony		X.: ± 0.30	2.50mm Pitch Female Terminal	SCALE: 1:1	
1X	ORIGINAL	Mark		APPD.:		X.X: ± 0.20	DATE: 22-Jul-2021	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy		X.XX: ± 0.15			A4
						X.XXX: ± 0.10			