






Specifications:
Material And Finish:
Insulator: UL94V-0

Rating:
Current Rating: 5 Amp
Voltage Rating: 250V
Operating Temperature Range: -25°~+85°C


Electrical:
Contact resistance: 10m ohm Max
Insulator resistance: 1000M ohm min
Withstanding Voltage: 1500V AC/Minute

Ordering Information
H25200M-XXP-01-XXA
1 2 3 456



- 1: Series No.
2: M: Male Housing
3: No. of Positions
4: L: PA66
P: PBT
5: N: Natural Y: Yellow
B: Black B: Blue
R: Red GN: Green
Br: Brown V: Violet
G: Grey O: Orange
6: A: In bag
C: In tray
G: Tape & Reel

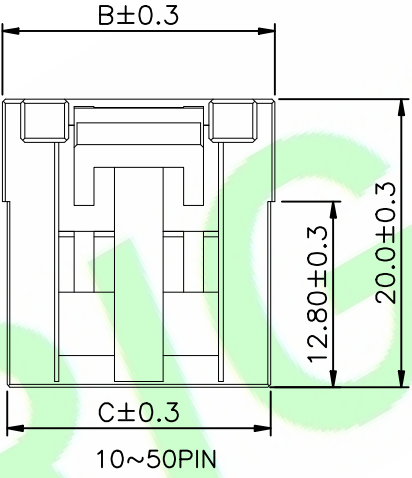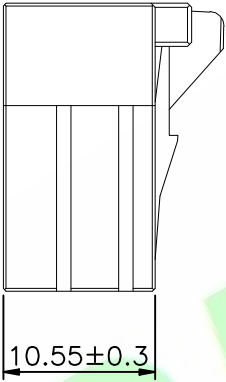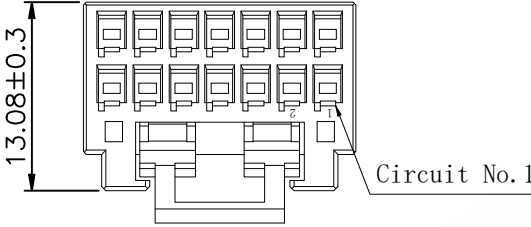

04PIN



06PIN

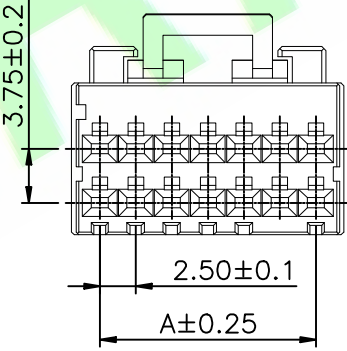


08PIN

Circuits	Dimensions (mm)		
	A	B	C
2X2	2.50	6.40	5.80
2X3	5.00	8.90	8.30
2X4	7.50	11.40	10.80
2X5	10.00	13.90	13.30
2X6	12.50	16.40	15.80
2X7	15.00	18.90	18.30
2X8	17.50	21.40	20.80
2X9	20.00	23.90	23.30
2X10	22.50	26.40	25.80
2X11	25.00	28.90	28.30
2X12	27.50	31.40	30.80
2X13	30.00	33.90	33.30
2X14	32.50	36.40	35.80
2X15	35.00	38.90	38.30
2X16	37.50	41.40	40.80
2X17	40.00	43.90	43.30
2X18	42.50	46.40	45.80
2X19	45.00	48.90	48.30
~	~	~	~
2X25	60.00	63.90	63.30

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25200M-XXP-01-XXA
	LINEAR	ANGLES	
CHKD.: Hu.ch	X.: ±0.35	X°: ±5.0°	DWG. NO.:
	X.X: ±0.25	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX°: ±2.0°	TITLE : 2.50*3.75Pitch Male Housing
	X.XXX: ±0.1	X.XXX°: ±1.0°	
DATE: 29-Jul-2024			

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.