

Specifications:

Material :phosphor bronze
Wire Range:18~28AWG

Rating:

Current Rating: 5 Amp
Voltage Rating: 250V
Operating Temperature Range:-25~+85°C

Electrical:


Contact resistance:10m ohm Max
Insulator resistance:1000M ohm min
Withstanding Voltage:1500V AC/Minute

Ordering Information

H25200TF-PX-XX

1 2 3 4 5

- 1: — Series No.
2: — TF:Female Terminal
3: — A:Gold Flash
Q: Tin Plated
S: Matte Tin Plated
A1: Gold flash on contact; Tin on tail
H: Gold flash on contact; Matte Tin on tail
4: — 01: 24~28AWG
02: 24AWG
03: 22~18AWG

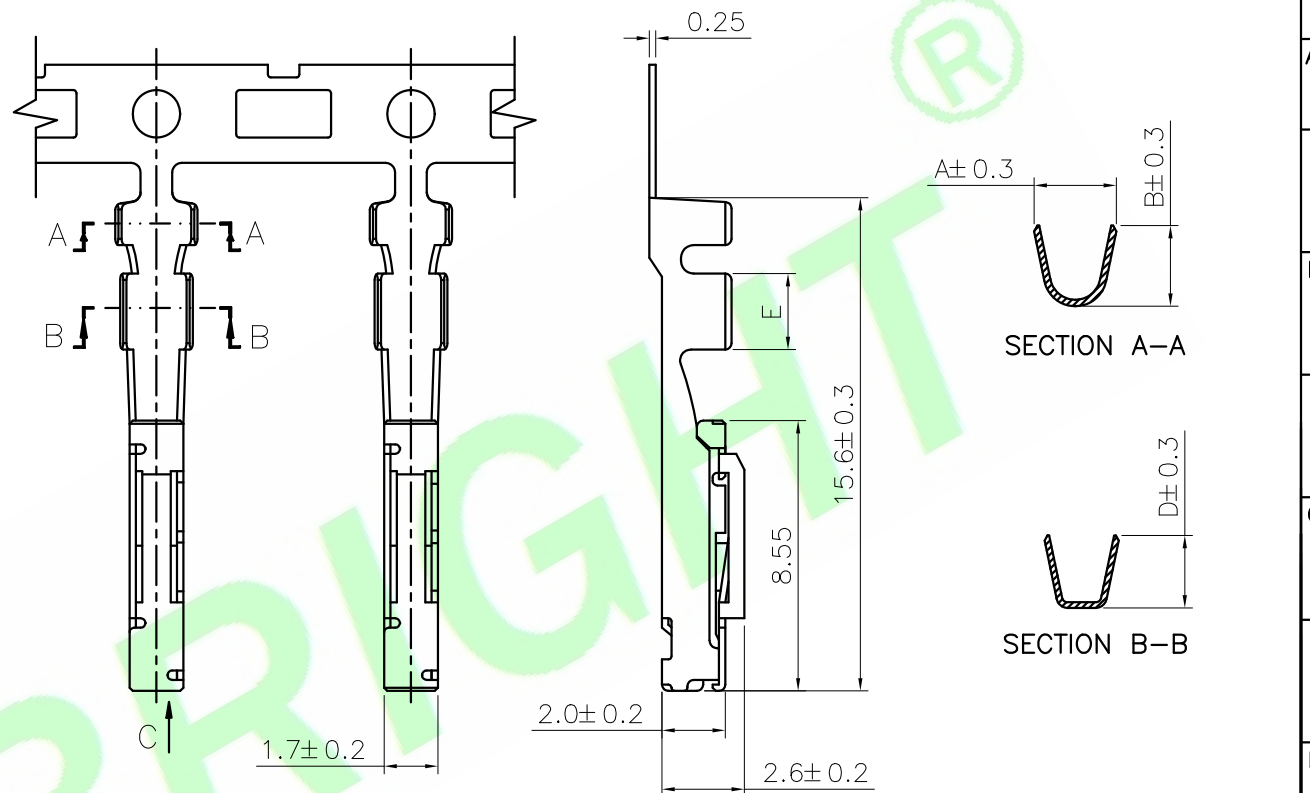

Terminal Type	Dimension mm					Wire Sizes AWG
	A	B	C	D	E	
H25200TF-PX-01	2.6	2.4	2.0	1.4	2.2	24~28AWG
H25200TF-PX-02	3.0	2.6	2.0	1.4	2.2	24AWG
H25200TF-PX-03	2.6	2.6	2.3	2.2	2.4	22~18AWG

DR.BY:	Judyyan	GENERAL TOLERANCE:		PART NO : H25200TF-PX-XX	HJBRIGHT® 東莞市華晶電子有限公司	
		LINEAR	ANGLES			DWG. NO.:
CHKD.:	Hu.ch	X.:	X°: ±5.0°	TITLE : 2.50*3.75Pitch Female Terminal	BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
		X.X: ±0.35	X.X°: ±3.0°			
APPD.:	Billy	X.XX: ±0.25	X.XX°: ±2.0°	DATE: 29-Jul-2024	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
		X.XXX: ±0.15	X.XXX°: ±1.0°			
						A4
					THIRD ANGLE PROJECTION	

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.