


Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Natural

Rating:
Current Rating:2.9 Amp
Voltage Rating:275V AC
Operating Temperature Range:-55°C~+125°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:5000M ohm min.
Withstanding Voltage:825V AC/Minute

Ordering Information
H254012M-XXP-01-NA
1 2 3 4

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — A:In Bag

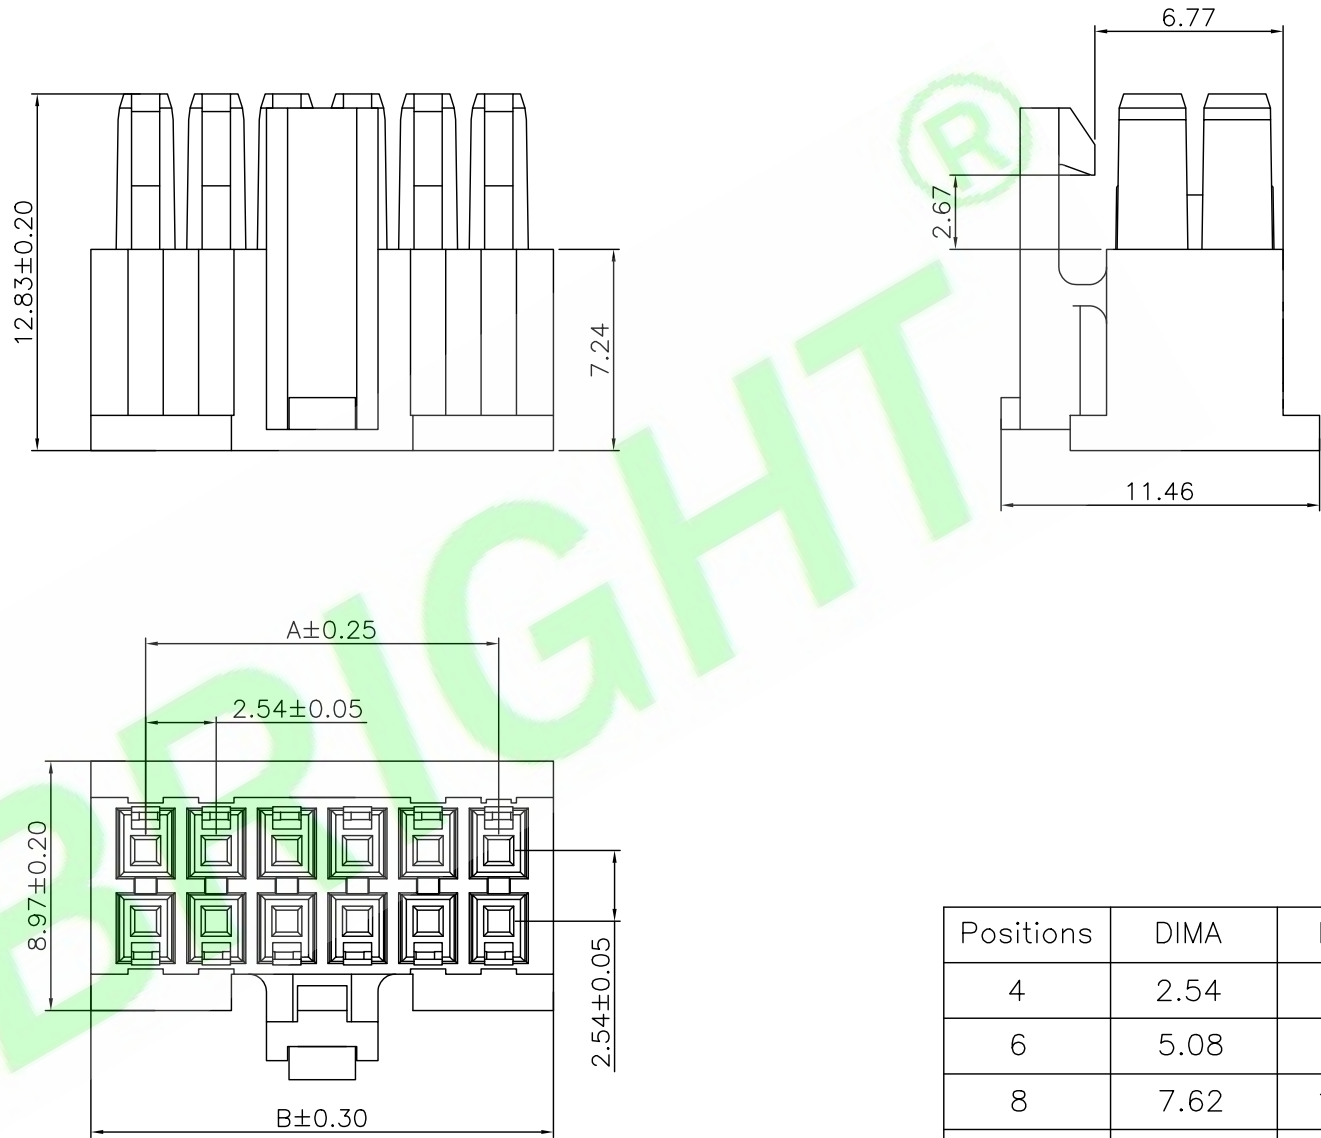

Positions	DIMA	DIMB
4	2.54	8.26
6	5.08	9.02
8	7.62	11.56
10	10.16	14.10
12	12.70	16.64

				DR.BY.: Zolin		GENERAL TOLERANCE:		PART NO : H254012M-XXP-01-NA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED									
						LINEAR ANGLES		DWG. NO.:											
2X Update drawing according to the product				Zolin		20250114		CHKD.: Aren		x.: ±0.30 x': ±5.0°		TITLE : 2.54mm Pitch Male Housing		SHEET: 1/1				A4	
1X ORIGINAL				Zolin				APPD.:		x.x: ±0.20 x.x': ±3.0°				SCALE: 1:1					
REV. DESCRIPTION				DR.BY		ECN. NO.		Billy		x.xx: ±0.15 x.xx': ±2.0°				UNIT: mm					
1		2		3		4		5		6		7		8		9			