

RoHS Compliant









Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0

Rating:
 Current Voltage:36VDC
 Operating Temperature Range:-40°C~+120°C

Electrical:
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1000V AC/Minute

Ordering Information
H254013M-21P-01-WX
 1 2 3 4 5

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — W:Black
- 5: — A:In Bag
 B:In Box

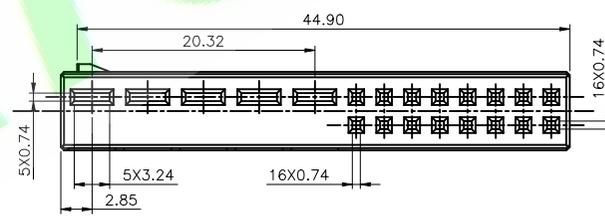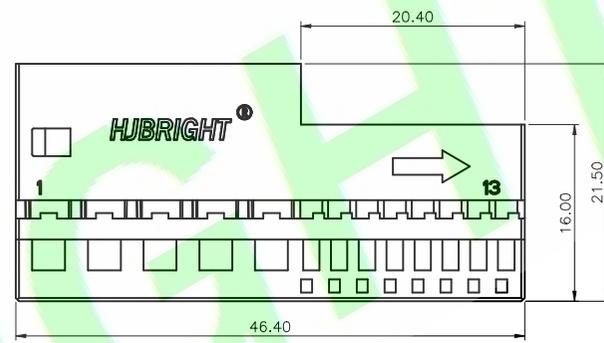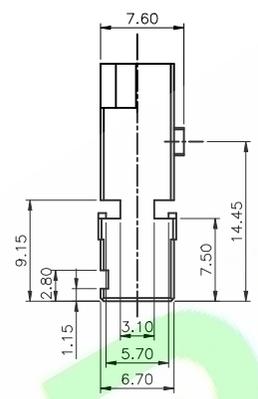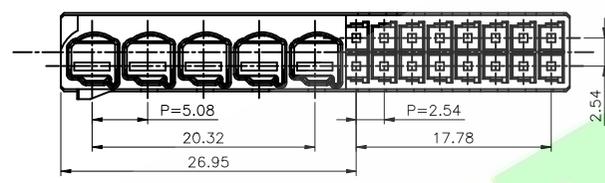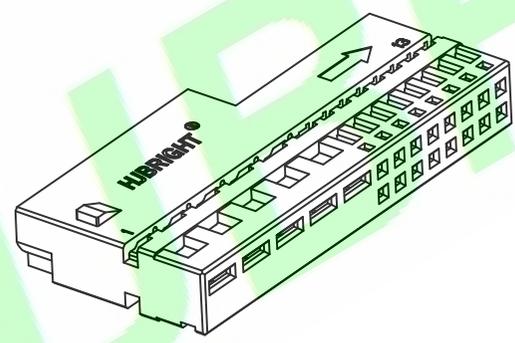

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H254013M-21P-01-WX	
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:	
	X.: ±0.30	X': ±5.0°	TITLE :	
	X.X: ±0.20	X.X': ±3.0°	5.08+2.54mm Pitch HOUSING	
	X.XX: ±0.10	X.XX': ±2.0°	DATE: 03-Aug-2024	
APPD.: Billy	X.XXX: ±0.10	X.XXX': ±1.0°		

HUBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 2:3
 UNIT: mm

THIRD ANGLE PROJECTION

A4

2X	Update the color based on the actual object	Judyyan	20260323
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO