

RoHS Compliant









Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0
 Color:Gray

Rating:
 Current Voltage:36VDC
 Operating Temperature Range:-40°C~+120°C

Electrical:
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1000V AC/Minute

Ordering Information
H254013M-21P-02-BX
 1 2 3 45

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — B:Gray
- 5: — A:In Bag
B:In Box

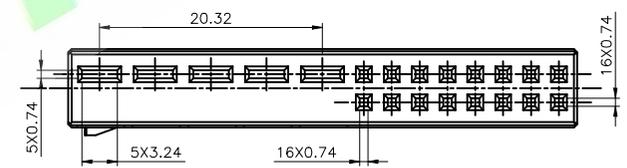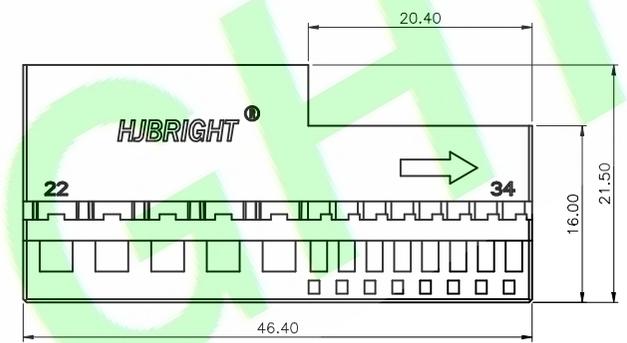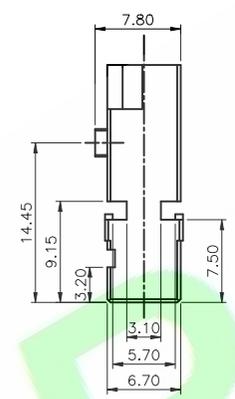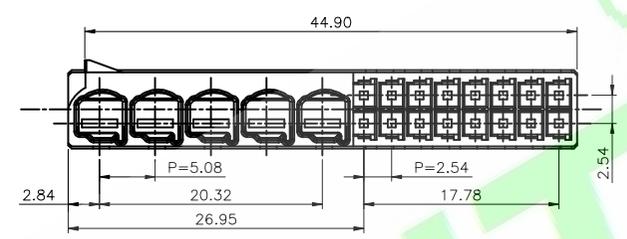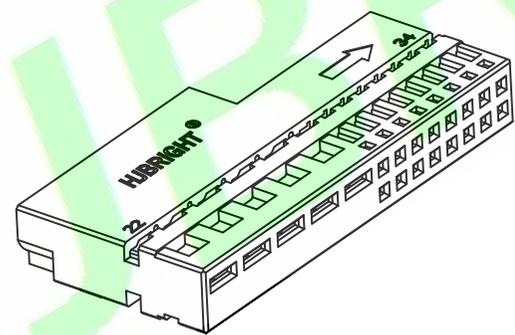

| | | | |
|------|-----------------------------------|-------|------------|
| 2X | Increase the height of the buckle | Hu.CH | 2025.09.15 |
| 1X | ORIGINAL | Hu.CH | |
| REV. | DESCRIPTION | DR.BY | ECN. NO. |

| | | | |
|------------------|--------------------|---------------|--------------------------------------|
| DR.BY.: Hu.CH | GENERAL TOLERANCE: | | PART NO : H254013M-21P-02-BX |
| CHKD.: Sam | LINEAR | ANGLES | DWG. NO.: |
| APPD.: Billy | X.: ±0.30 | X': ±5.0° | TITLE : 5.08+2.54mm Pitch Housing |
| | X.X: ±0.20 | X.X': ±3.0° | DATE: 03-Aug-2024 |
| | X.XX: ±0.10 | X.XX': ±2.0° | |
| | X.XXX: ±0.10 | X.XXX': ±1.0° | |

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 3:2
 UNIT: mm

THIRD ANGLE PROJECTION

A4