

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Rating:

Current Voltage:36VDC

Operating Temperature Range:-40°C~+120°C

Electrical:

Insulator resistance:1000M ohm min.







Withstanding Voltage:1000V AC/Minute


Ordering Information

H254013M-21P-02-XX

1 2 3 4 5

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — B:Black
5: — A:In Bag
B:In Box

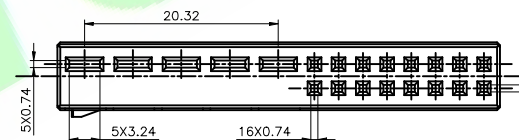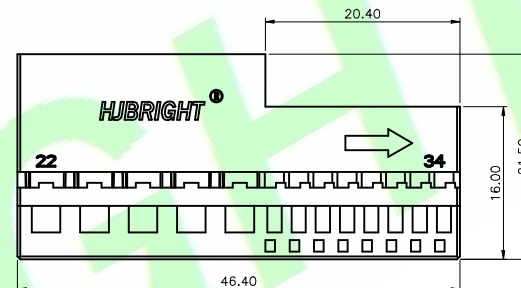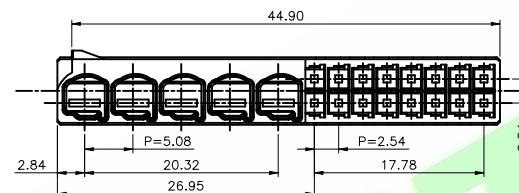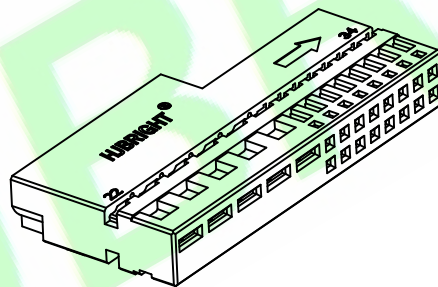

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H254013M-21P-02-XX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
	LINEAR	ANGLES					DWG. NO.:	
CHKD.: Sam	X.:	X°: ±5.0°	TITLE : 5.08+2.54mm Pitch Housing	SHEET: 1/1		A4		
	X.X: ±0.30	X.X°: ±3.0°		SCALE: 1:1				
APPD.: Billy	X.XX: ±0.20	X.XX°: ±2.0°		DATE: 03-Aug-2024			UNIT: mm	THIRD ANGLE PROJECTION
	X.XXX: ±0.10	X.XXX°: ±1.0°						

1X	ORIGINAL	Hu.CH	ECN. NO.
REV.	DESCRIPTION	DR.BY	