

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Rating:

Current Voltage:36VDC

Operating Temperature Range:-40°C~+120°C

Electrical:

Insulator resistance:1000M ohm min.






Withstanding Voltage:1000V AC/Minute

Ordering Information

H254013M-42P-01-XX

1	2	3	4	5
---	---	---	---	---

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — B:Black
5: — A:In Bag
B:In Tube

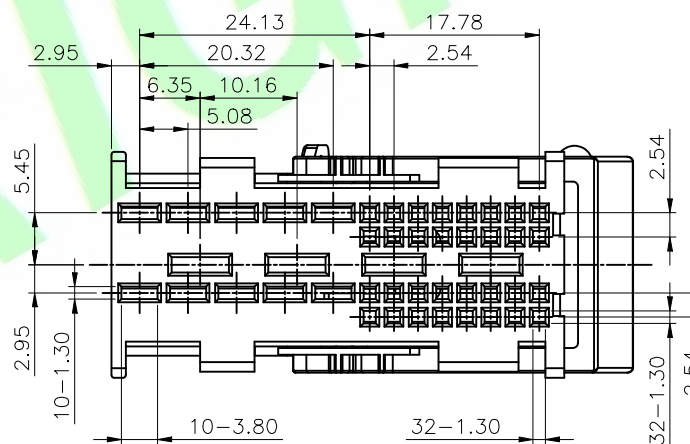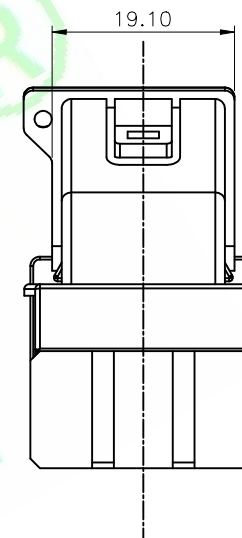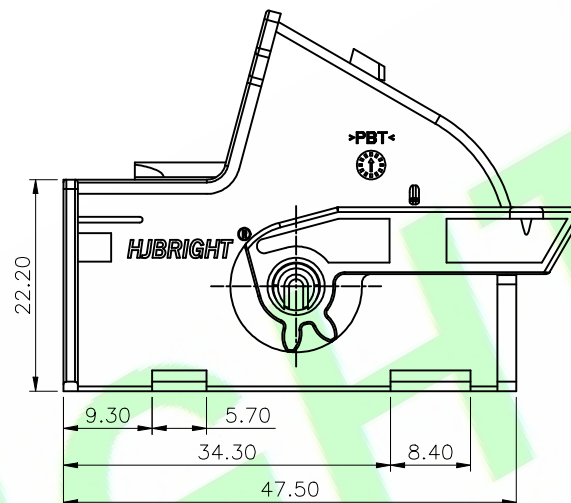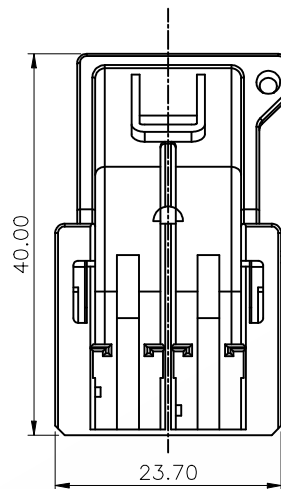

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H254013M-42P-01-XX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Sam	x.:	x°: ±5.0°	TITLE : 5.08+2.54mm Pitch SHELL OF WIRE	
	x.x: ±0.30	x.x°: ±3.0°		
APPD.: Billy	x.xx: ±0.20	x.xx°: ±2.0°	DATE: 02-Aug-2024	
	x.xxx: ±0.10	x.xxx°: ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Hu.CH	ECN. NO
REV.	DESCRIPTION	DR.BY	