

RoHS Compliant

Specifications:
Material And Finish:
Contact: Copper alloy


Rating:
Current Rating: 6.0 Amp
Voltage Rating: 14V AC/DC
Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:
Contact resistance: 10m Ohm Max

Ordering Information
H254015TF-PX-XX

1 2 3 4

- 1: — Series No.
2: — TF: Female Terminal
3: — Q: Tin Plated
4: — 01: 22AWG
02: 20AWG

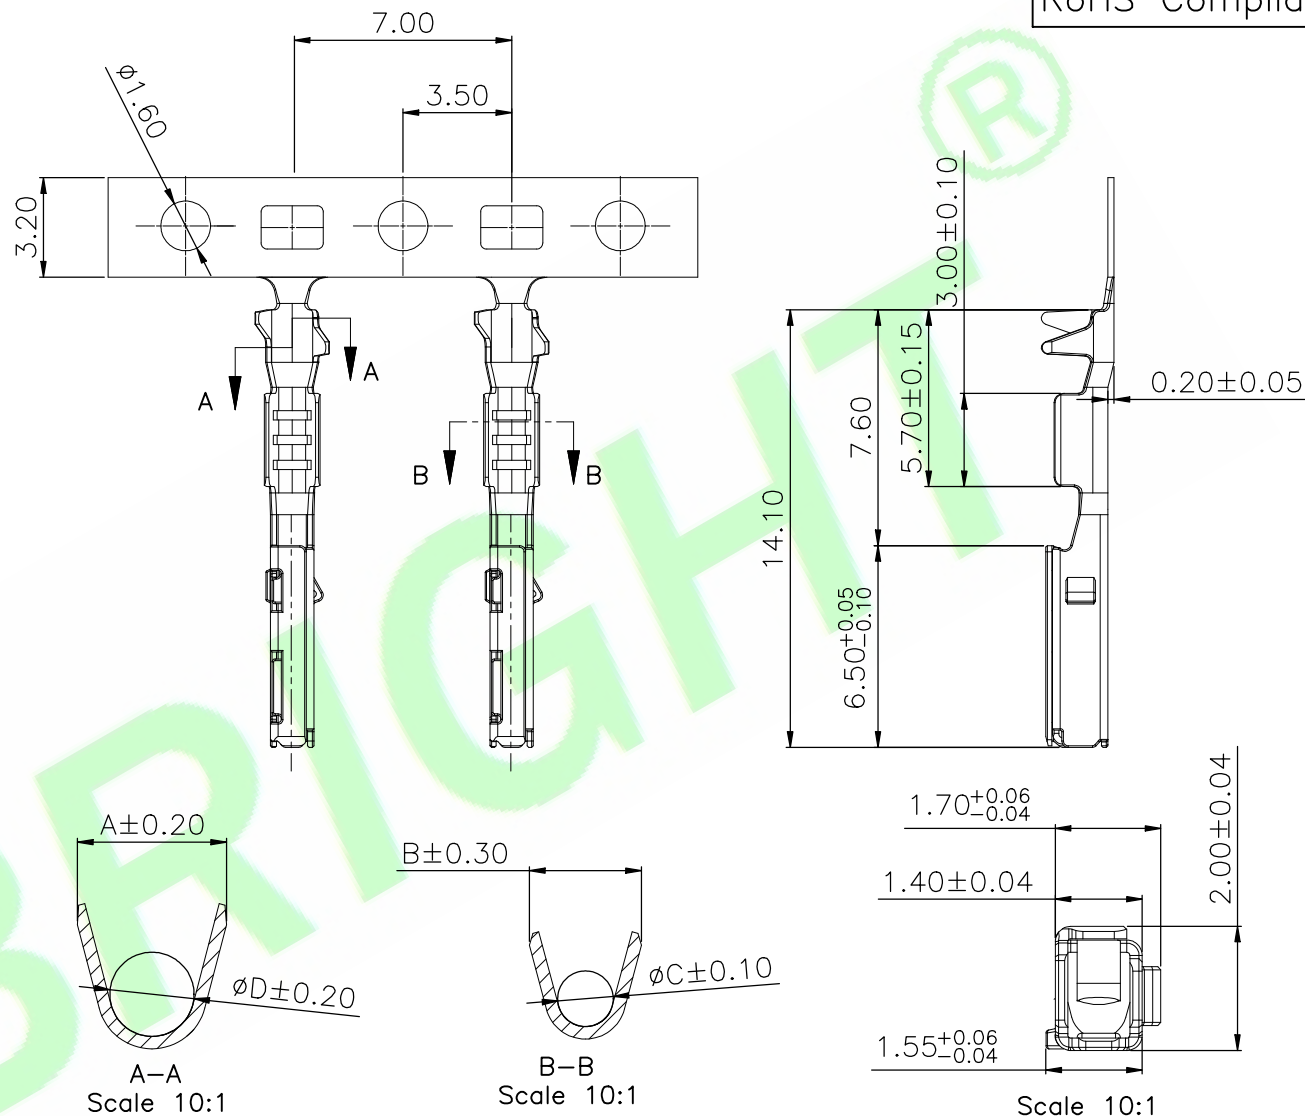

P/N	WIRE RANGE	DIM A	DIM B	DIM C	DIM D
H254015TF-PX-01	22AWG	1.80	2.40	0.90	1.36
H254015TF-PX-02	20AWG	2.15	2.50	1.20	1.72

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H254015TF-PX-XX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ± 0.40	X': $\text{REF} \pm 6^{\circ}$	DWG. NO.:
	X.X: ± 0.35	X.X': $\pm 3.0^{\circ}$	
APPD.: Billy	X.XX: ± 0.25	X.XX': $\pm 2.0^{\circ}$	TITLE : Pitch 2.54mm Female Terminal
	X.XXX: ± 0.15	X.XXX':	
		DATE: 29-Aug-2023	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.