

Specifications:

Material:

Insulator: PA66 UL94V-0 Color: Black

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.









Withstanding Voltage: 600V AC/Minute

Ordering Information

H2541-XXP-BA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — B: Black
4: — A: In Bag

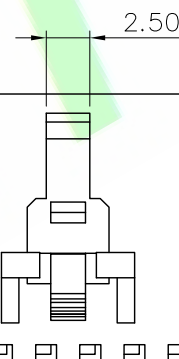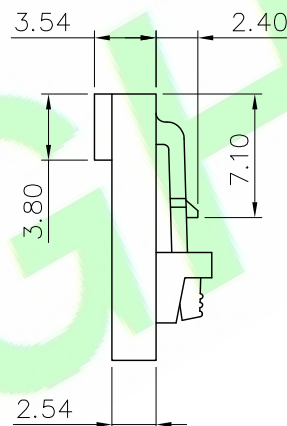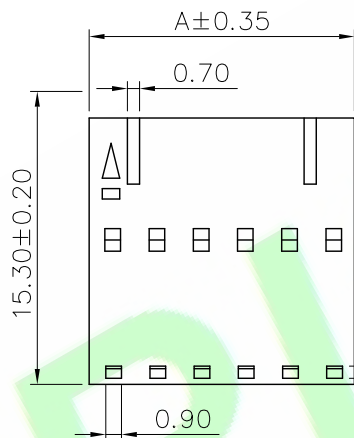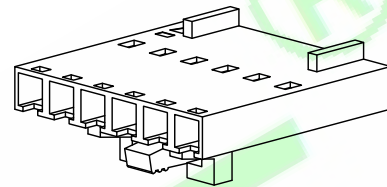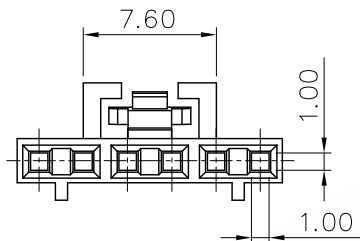

02P

03~20P

Poles	Dimensions	
	A	B
02P	5.08	2.54
03P	7.62	5.08
04P	10.16	7.62
05P	12.70	10.16
06P	15.24	12.70
07P	17.78	15.24
08P	20.32	17.78
09P	22.86	20.32
10P	25.40	22.86
11P	27.94	25.40
12P	30.48	27.94
13P	33.02	30.48
14P	35.56	33.02
15P	38.10	35.56
16P	40.64	38.10
17P	43.10	40.64
18P	45.64	43.18
20P	50.72	48.26

5X			
4X			
3X	Update technical parameters	Deng	20230602
2X	Update code options	Judyyan	20220827
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Samson
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ± 0.30	X': $\pm 5.0^{\circ}$
X.X: ± 0.20	X.X': $\pm 3.0^{\circ}$
X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$
X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$

PART NO : H2541-XXP-BA

DWG. NO.:

TITLE :

MX 2.54mm Pitch Housing


DATE: 22-Jul-2014

HJBRIGHT 东莞市华晶电子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4