

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC


Operating Temperature Range: $-40^{\circ}\sim+120^{\circ}\text{C}$

Ordering Information


H25414F-03-XXA

1 2 3 456

- 1: — Series No.
2: — F: Female Housing
3: — No. of Positions
4: — B: Black
N: Natural
L: Blue
G: Green
5: — A: A Type
B: B Type
C: C Type
E: E Type
6: — A: In Bag

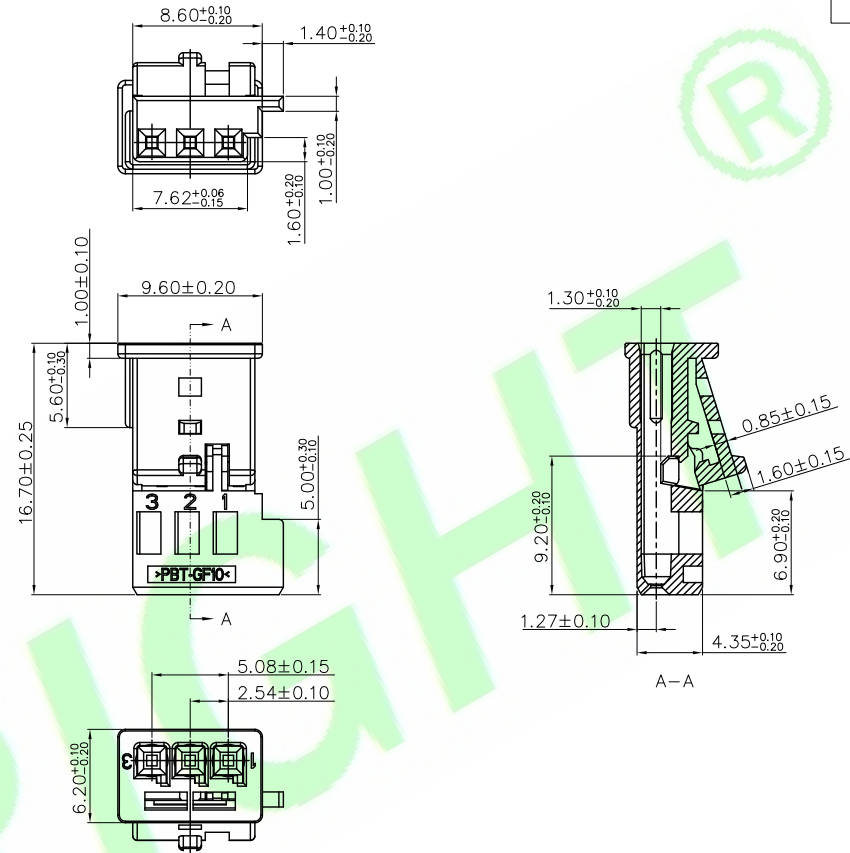


A Type



A


BLACK

B Type




NATURAL

C Type




BLUE

E Type



GREEN

5X				DR.BY:	Judyyan	GENERAL TOLERANCE:		PART NO : H25414F-03-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	Aren	X.: ±	X': ±	TITLE : 2.54mm Pitch Female Housing	SHEET: 1/1		A4
2X	Update code options	Judyyan	20220824			X.X: ±0.30	X.X': ±		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	Billy	X.XX: ±0.20	X.XX': ±		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XXX: ±0.10	X.XXX': ±	DATE: 19-Aug-2020			