

**Specifications:**

**Material And Finish:**

Insulator: PBT UL94V-0  
Color: See Ordering Information

**Rating:**

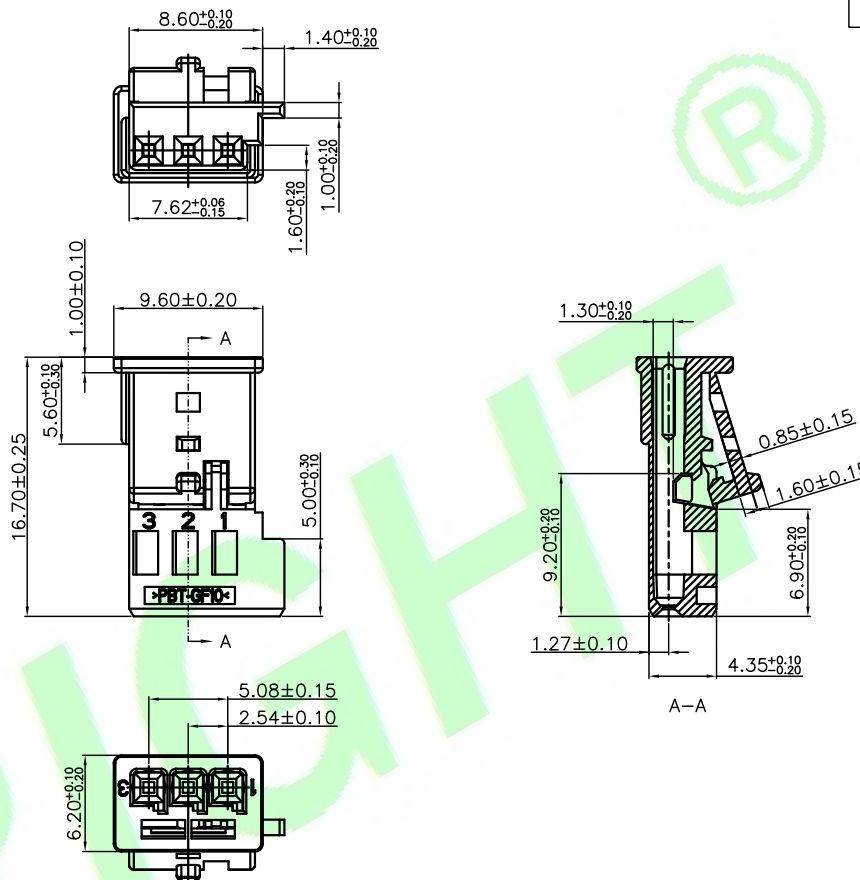
Current Rating: 7.5 Amp (18AWG)  
Voltage Rating: 250V AC/DC  
Operating Temperature Range: -40°~+120°C





**Ordering Information**


H25414F-03-XXA

1 2 3 4 5 6

- 1: — Series No.
- 2: — F:Female Housing
- 3: — No. of Positions
- 4: — B:Black  
N:Natural  
L:Blue  
G:Green
- 5: — A:A Type  
B:B Type  
C:C Type  
E:E Type
- 6: — A:In Bag



A Type	B Type	C Type	E Type
			
BLACK	NATURAL	BLUE	GREEN

5X				DR.BY: Judyyan	GENERAL TOLERANCE:		PART NO : H25414F-03-XXA		<b>HJBRIGHT®</b> 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD: Aren	LINEAR	ANGLES	DWG. NO.:			
3X	Update the drawings	Zolin	20260408	APPD: Billy	X.: ±	X': ±	TITLE :	2.54mm Pitch Female Housing		SHEET: 1/1
2X	Update code options	Judyyan	20220824		X.X: ±0.30	X.X': ±	DATE: 19-Aug-2020	SCALE: 1:1	 THIRD ANGLE PROJECTION	
1X	ORIGINAL	Judyyan			X.XX: ±0.20	X.XX': ±	UNIT: mm	A4		
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	X.XXX': ±				