

Specifications:**Material And Finish:**

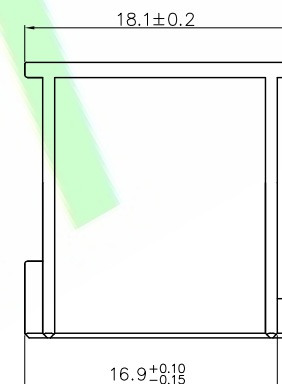




Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:



Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+120^{\circ}\text{C}$ **Ordering Information****H25414F-06-XXA**

1 2 3 4 5 6

- 1: — Series No.
 2: — F: Female Housing
 3: — No. of Positions
 4: — B: Black
 N: Natural
 5: — A: A Type
 B: B Type
 6: — A: In Bag

A Type**B Type****BLACK****NATURAL**

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414F-06-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	X.: ±	X': ±	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X	Update code options	Judyyan	20220824		X.X: ±0.30	X.X': ±	2.54mm Pitch Female Housing	SCALE: 1:1			
1X	ORIGINAL	Judyyan			X.XX: ±0.20	X.XX': ±	DATE: 19-Aug-2020	UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±					